


FIELD NOTCH HEMS OF JOINING EAVE TRIM
 3" LONG AND 1/8" WIDE AT SPLICE. APPLY (2)
 3/8" BEADS OF NON-SKINNING BUTYL SEALANT
 TO TOPSIDE OF JOINING EAVE TRIM
 BEFORE ENGAGING

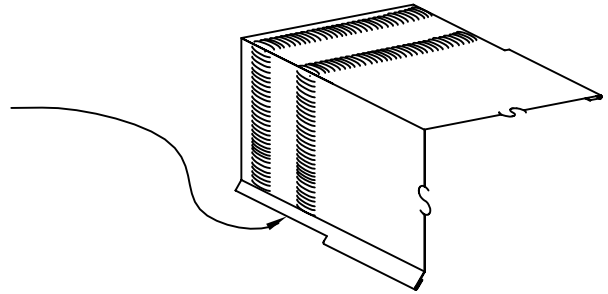

1/8" RIVETS
 AT TRIM LAP
 IN SEALANT LINE
 IF NECESSARY
 TO CLOSE
 "FISHMOUTH"

1/8" RIVETS 12" O.C. MAX.

3/16"x7/8" CONTINUOUS
 BUTYL TAPE

CAP-SEAM PANEL

SEAM COVER STOPS AT
 ZEE CLOSURE TRIM

ZEE CLOSURE
 TRIM

HIGH EAVE TRIM

NON-SKINNING BUTYL
 SEALANT AT ENDS.

3/16"x7/8"
 CONTINUOUS
 BUTYL TAPE

PANCAKE HEAD FASTENERS:
 (2) EQUALLY SPACED FOR
 12" WIDE PANELS
 (4) EQUALLY SPACED FOR
 20" WIDE PANELS


30# FELT (NOT
 BY AEP-SPAN)

PANCAKE HEAD
 FASTENER 12" O.C.

CONTINUOUS
 CLEAT



CAP-SEAM



HIGH EAVE

CS3D11