


PANEL TURN DOWN:
 WITH QUICK-RELEASE PINS INSTALLED AT 7/8" TOOL DEPTH, SLIP TOOL OVER PANEL END (AT EAVE) AND BEND DOWN 3/8" MAXIMUM.

PANEL TURN UP:
 WITH QUICK-RELEASE PINS STORED AT BACK OF TOOL, ENGAGE TOOL FULLY ONTO PANEL AND TURN UP.

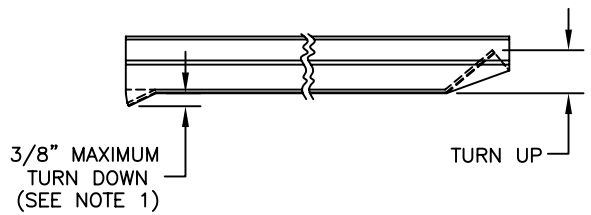

NOTES:

- 1) TURNING DOWN TOO MUCH WILL MAKE IT DIFFICULT TO REMOVE TOOL AND COULD SCRATCH PANEL.
- 2) WRAPPING DUCT TAPE AROUND TOP CORNERS WILL REDUCE POSSIBILITY OF MARKING PANEL SURFACES.



KLIP-RIB



TURN UP & TURN DOWN TOOL USAGE

KR-24