


DESIGN CAUTION:  
 ROOF SLOPE TRANSITIONS  
 SUCH AS FASCIAS MAY  
 ESTABLISH AN UNWANTED  
 POINT OF PANEL FIXITY.



APPLY NON-SKINNING BUTYL SEALANT  
 BETWEEN PANELS AT FIELD CUT.  
 REFER TO EAVE DETAIL FOR  
 LOCATION OF SEALANT. BEADS  
 REQUIRED ON BOTH SIDES OF CUT.

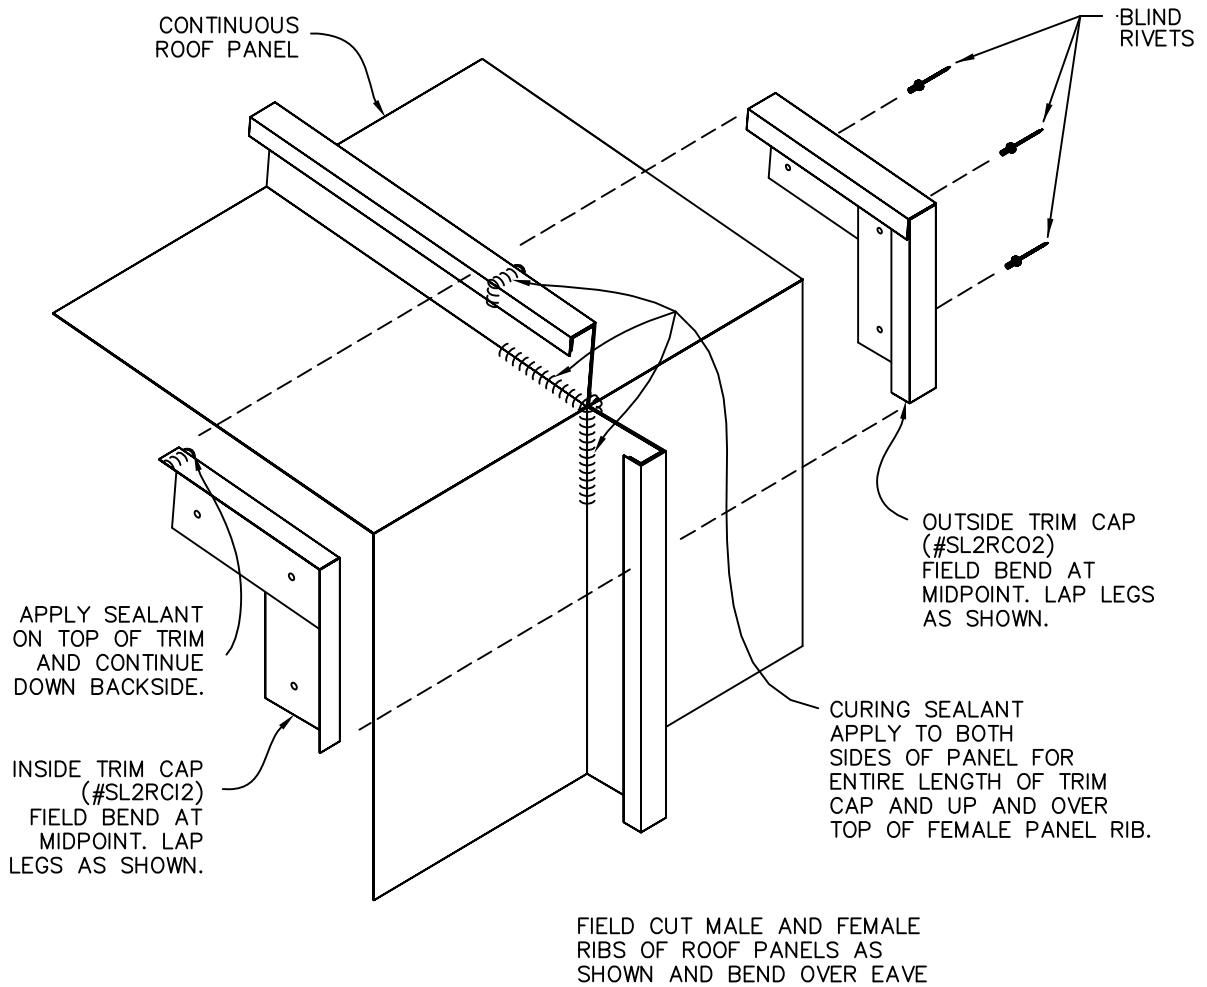

SPAN-LOK

RIB COVER

SL-27