


(1) 3/8" x 12" LONG BEAD OF NON-SKINNING BUTYL SEALANT ON THE TOP FLANGE OF MALE PANEL.

(1) 3/8" BEAD OF NON-SKINNING BUTYL SEALANT APPLIED ON SIDE OF PANEL LEG & TIED INTO TAPE SEALANT

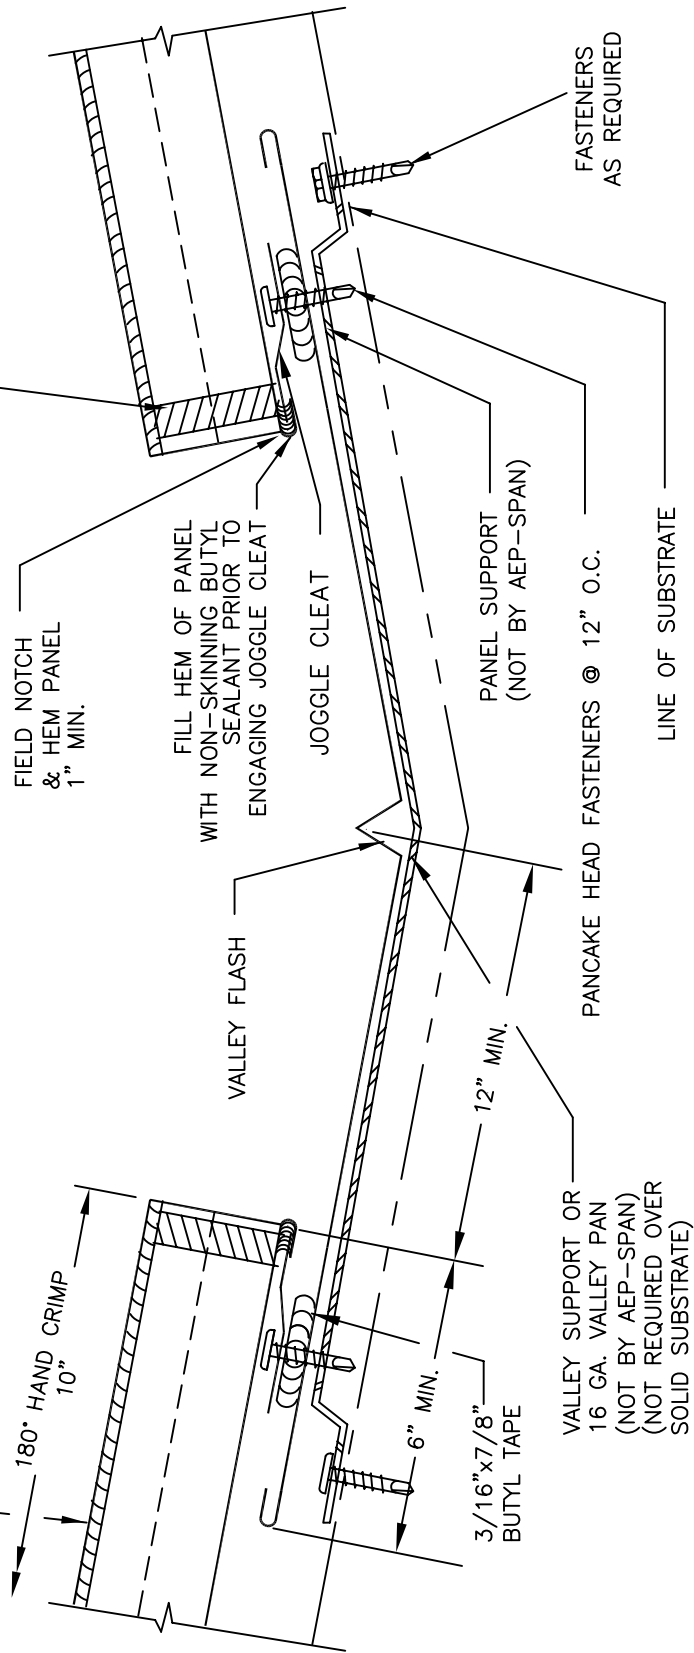

FIELD NOTCH & HEM PANEL 1" MIN.

FILL HEM OF PANEL WITH NON-SKINNING BUTYL SEALANT PRIOR TO ENGAGING JOGGLE CLEAT

VALLEY FLASH

JOGGLE CLEAT

PANEL SUPPORT (NOT BY AEP-SPAN)

FASTENERS AS REQUIRED

PANCAKE HEAD FASTENERS @ 12" O.C.

LINE OF SUBSTRATE

12" MIN.

3/16" x 7/8" BUTYL TAPE

VALLEY SUPPORT OR 16 GA. VALLEY PAN (NOT BY AEP-SPAN) (NOT REQUIRED OVER SOLID SUBSTRATE)



SPANSEAM



VALLEY - FLOATING