


TW-12



PANEL INTERLOCK OPTIONS

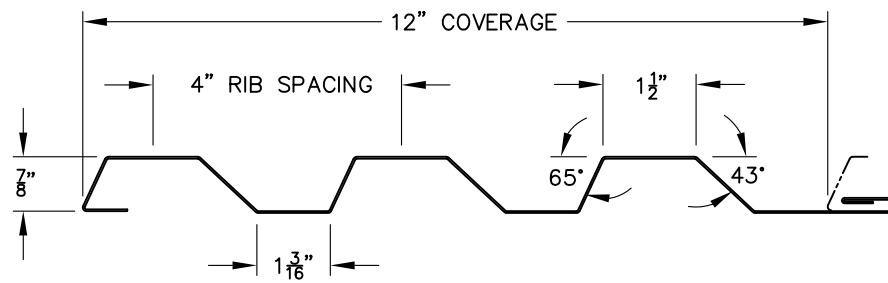

DIRECT FASTENED  
(‘D’ P/N SUFFIX)



CLIP ATTACHED  
(‘C’ P/N SUFFIX)


MATERIAL:

STEEL: 22 & 24GA (20GA NON-STD.)

AVAILABLE LENGTHS: 5’-20’



**TW-12**  
VERTICAL INSTALL.



PANEL DETAILS

TWV-01