


DESIGN CAUTION:
 ROOF SLOPE TRANSITIONS
 SUCH AS FASCIAS MAY
 ESTABLISH AN UNWANTED
 POINT OF PANEL FIXITY.



APPLY NON-SKINNING BUTYL SEALANT
 BETWEEN PANELS AT FIELD CUT.
 REFER TO EAVE DETAIL FOR
 LOCATION OF SEALANT. BEADS
 REQUIRED ON BOTH SIDES OF CUT.

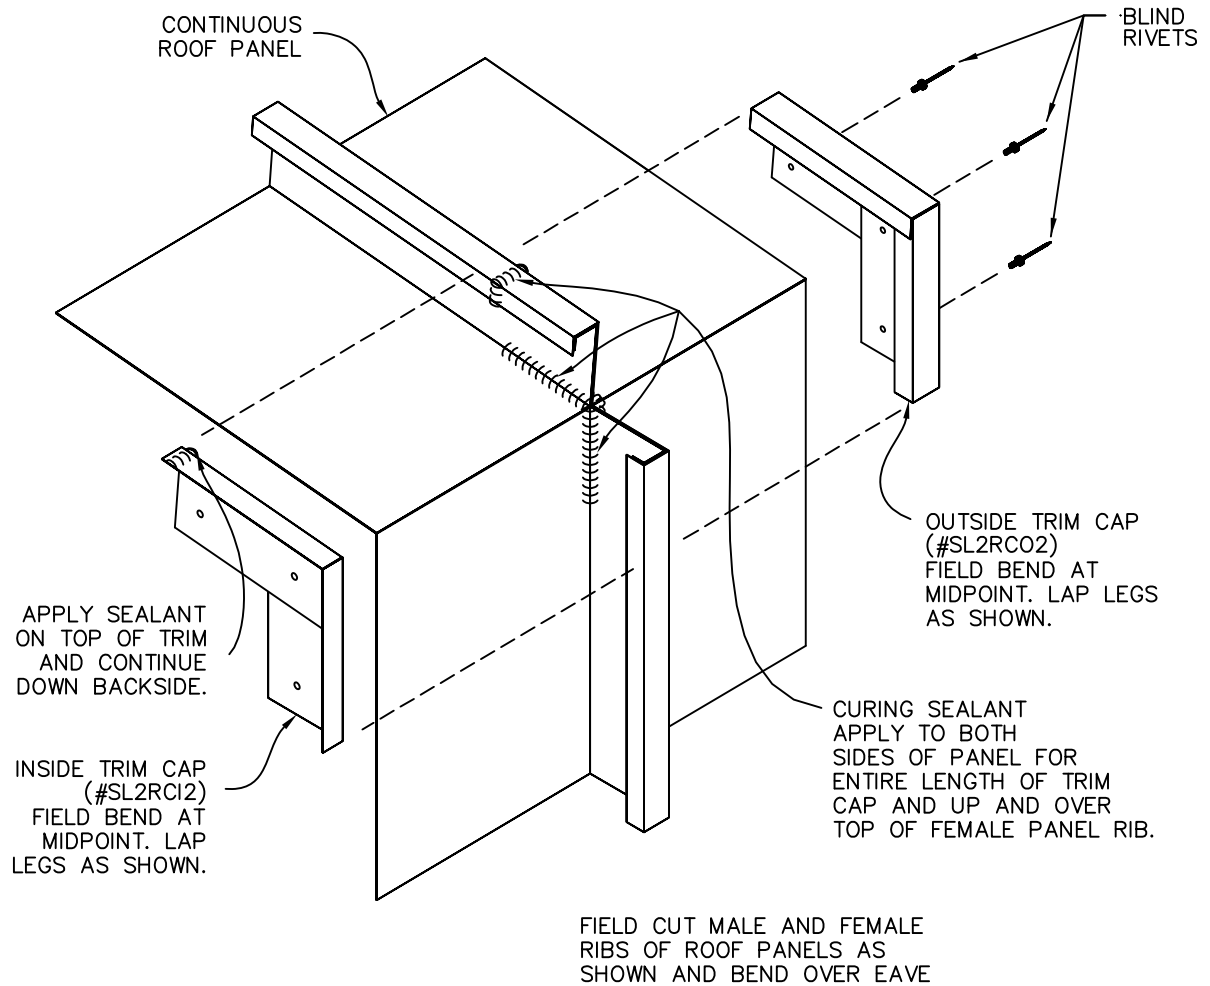

SPAN-LOK hp

RIB COVER

SL-27