


NON-SKINNING BUTYL
SEALANT APPLIED TO
ENDS OF ZEE CLOSURE

FIELD NOTCH
ZEE CLOSURE
AT RIB

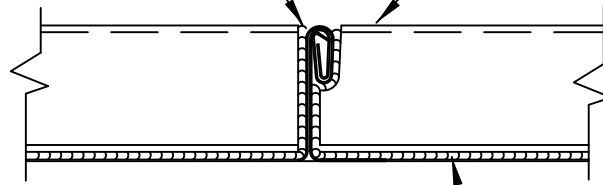

SECTION X-X

3/16"x7/8" BUTYL TAPE

CONSTRUCTION SEALANT
(NOT BY AEP-SPAN)

CONTINUOUS 3/8" BEAD
NON-SKINNING BUTYL SEALANT

REGLET FLASHING*
(RG145: 4")
(RG147: 5")
(RG149: 6")

HEAD WALL FLASHING**
(PB113: 6")
(PB115: 7")
(RG117: 8")

ENGINEERED
FASTENER
(NOT BY AEP-SPAN)

1/8" POP RIVETS
@12" O.C.

90° HAND CRIMP
10"

3/16"x7/8"
BUTYL TAPE

ZEE CLOSURE
(ZC223)

NON-SKINNING BUTYL SEALANT
APPLIED TO ENDS OF ZEE
CLOSURE

16 GA. PANEL SUPPORT
(NOT REQ'D W/LOW PROFILE CLIP)

FASTENER AS REQUIRED

3/16"x7/8" CONT. BUTYL TAPE

FASTENER AS REQUIRED

NOTE:
FIRST 10" OF PANEL DOWNHILL OF HEADWALL
FLASHING WILL NEED TO BE 180° HAND
CRIMPED TO GET SEAMER ON/OFF.



SPANSEAM



HEAD WALL - FIXED

SPS-13