



NON-SKINNING BUTYL  
SEALANT APPLIED TO  
ENDS OF ZEE CLOSURE

FIELD NOTCH  
ZEE CLOSURE  
AT RIB

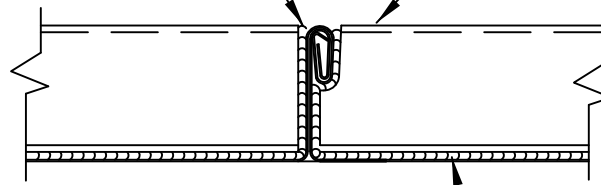

SECTION X-X

3/16"x7/8" BUTYL TAPE

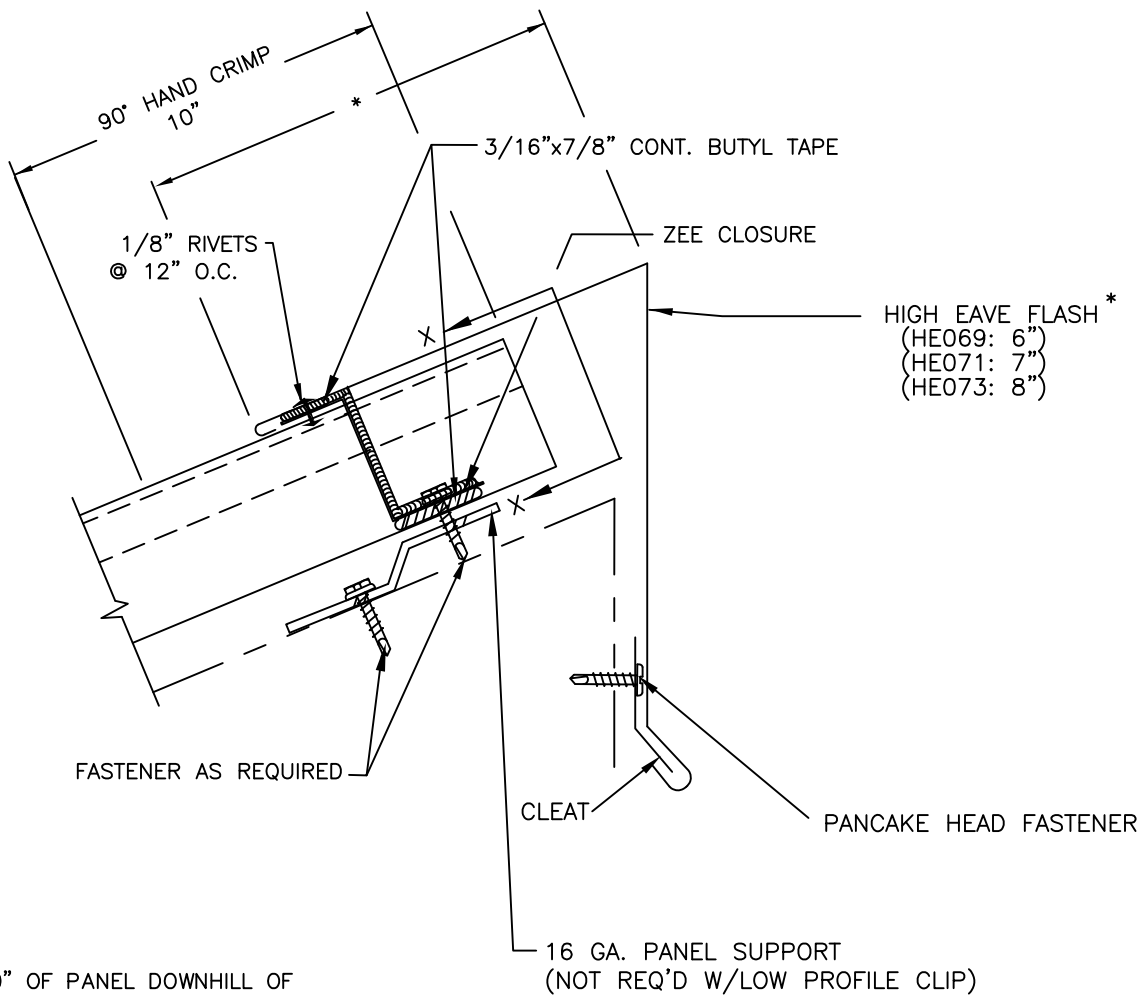

NOTE:  
FIRST 10" OF PANEL DOWNHILL OF  
HIGH EAVE FLASHING WILL NEED TO  
BE 180° HAND CRIMPED TO GET  
SEAMER ON/OFF.



SPANSEAM



HIGH EAVE - FIXED

SPS-15