


NON-SKINNING BUTYL
SEALANT APPLIED TO
ENDS OF ZEE CLOSURE

FIELD NOTCH
ZEE CLOSURE
AT RIB

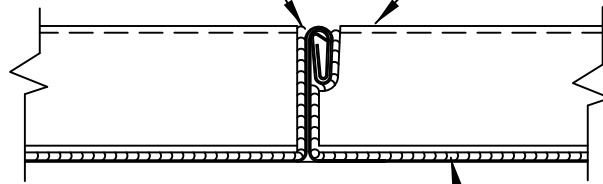

SECTION X-X

3/16"x7/8" BUTYL TAPE

1/4-14 X 7/8" HWH SCOTS
W/NEO. WASHER PAINTED
@ RIBS AND MIN. (1)
BETWEEN RIBS OR
MAX. 9" CTRS.

90° HAND CRIMP
10"

HIGH EAVE FLASHING**
(HE075: .25:12 -6:12)
(HE077: 6:12 - 12:12)

NON-SKINNING BUTYL SEALANT

3/16"x7/8"
CONT. BUTYL TAPE

18 GA. CONT.
PANEL END SUPPORT

TRIM CLEAT
(TC209)

PANCAKE HEAD FASTENER

"Z" CLOSURE
(ZC223)
FIELD CUT TO FIT
BETWEEN RIBS

FASTENER AS REQUIRED

NOTE:
FIRST 10" OF PANEL DOWNHILL OF HIGH EAVE
FLASHING WILL NEED TO BE 180° HAND
CRIMPED TO GET SEAMER ON/OFF.



SPANSEAM



HIGH EAVE - FLOATING

SPS-16