



## **Perception Collection<sup>®</sup>**

(Horizontal Installation)  
Installation Guide

# Perception Collection®

## (Horizontal Install.) Installation Guide

### - Table of Contents -

<b>Section</b>	<b>Page</b>
<i>General Notes</i> .....	<i>i</i>
<i>Panel Details</i> .....	<i>1</i>
<i>Clips</i> .....	<i>2</i>
<i>Panel Closures</i> .....	<i>3</i>
<i>Closure Installation</i> .....	<i>4</i>
<i>Base</i> .....	<i>5</i>
<i>Sill</i> .....	<i>6</i>
<i>End Wall</i> .....	<i>7</i>
<i>Outside Corner</i> .....	<i>8</i>
<i>Inside Corner</i> .....	<i>9</i>
<i>Soffit (Front)</i> .....	<i>10</i>
<i>Soffit (Back)</i> .....	<i>11</i>
<i>End Splice (w/Trim)</i> .....	<i>12</i>
<i>Parapet</i> .....	<i>13</i>
<i>Door/Window (Head)</i> .....	<i>14</i>
<i>Door/Window (Jamb)</i> .....	<i>15</i>
<i>Door/Window (Sill)</i> .....	<i>16</i>
<i>Wall Penetration (3D)</i> .....	<i>17</i>
<i>Wall Penetration</i> .....	<i>18</i>
<i>Rigid Insulation</i> .....	<i>19</i>

## General Notes

The attached installation details are intended to be a design aid and do not depict all situations. Modifications are the responsibility of the designer/user and should take into account climate conditions such as wind and snow, governing code requirements, and the actual usage and maintenance of the structure.

### Applications:

Perception Collection can be utilized as a wall panel installed in the vertical or horizontal orientation. It shall not be utilized for roof applications. Perception Collection can be used over solid substrates or over spaced supports. This installation guide depicts clip attached panels installed using flush mounted clips. Details for direct fastened panels or clip attached panels using standoff clips would be similar.

### Flashings:

Where possible, flashings should be lapped away from prevailing winds. Certain flashings should be supported if it is likely that equipment (ladder, etc.) will be used against them. Check with AEP Span any time you intend to specify a prefinished flashing in a gauge or finish different than the Perception Collection. It is good practice to specify that all flashings be of the same material (gauge, color, finish) as the roof panels to ensure long-term durability. Field-painted flashings rarely equal the durability and colorfastness of factory baked-on paint systems. The enclosed details have minimized the use of exposed fasteners where possible. The edges of flashings have also been shown hemmed to strengthen and to minimize the exposure of cut edges.

Flashing design and fabrication is generally the responsibility of the contractor. For convenience, we have provided some typical flashing drawings on our website at <http://www.aepspan.com/roof/prodDetailad08.html?id=35>. Applicable Perception Collection flashing part numbers are referenced within this installation guide. Note that flashing shapes and dimensions may vary greatly based on project requirements. Installation details and flashings referenced within are for general design guidance only.

### Condensation, Insulation, & Ventilation:

It is the designer's responsibility to determine the need and composition of condensation control materials including insulation and vapor retarders, as well as ventilation requirements. Metal wall products are susceptible to condensation and its control should be carefully considered.

### Thermal Movement:

Both panels and flashings must allow for thermal movement (expansion and contraction) of the materials, especially where long lengths are used. Appropriate gaps or provisions must be provided to accommodate thermal movement.

### Oil Canning:

Flat metal surfaces often display waviness commonly referred to as 'oil canning'. This can be caused by variations in raw material, processing variations, product handling, or variations in the installation substrate. Oil canning is a characteristic, not a defect, of panels manufactured from light-gauge metal. To reduce potential for oil canning, substrates should not deviate from a flat plane more than 1/4 inch in 20 feet, or 1/8 inch in 5 feet. Oil canning is not a cause for panel rejection. Additional technical information is available upon request.






### References:

The Sheet Metal and Air Conditioning Contractors' National Association Inc. (SMACNA) manual is an excellent reference for sheet metal contractors. It's guidelines for underlayments, gutter and downspout size requirements, and expansion/contraction of metals and flashing joints should be followed.

### Technical Assistance:

Contact your AEP Span Sales Representative for additional information.



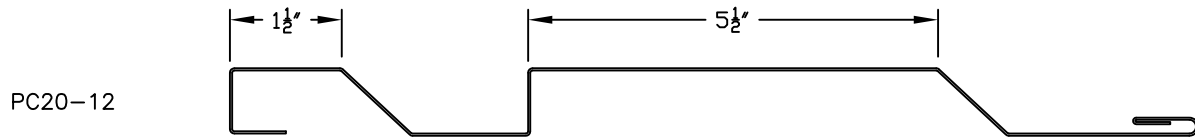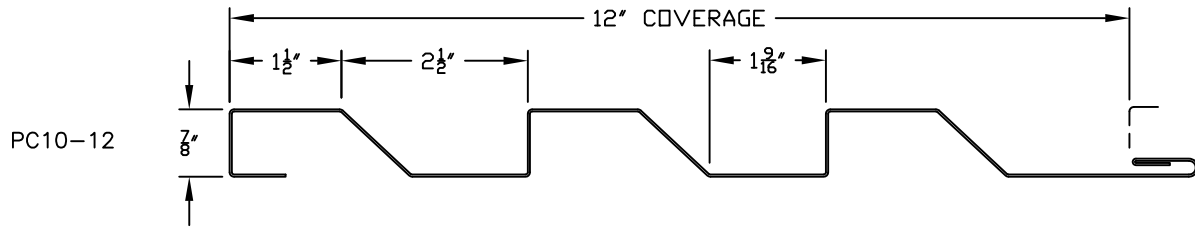

PANEL INTERLOCK OPTIONS



DIRECT FASTENED  
(‘D’ P/N SUFFIX)




CLIP ATTACHED  
(‘C’ P/N SUFFIX)

**MATERIAL:**

STEEL: 22 & 24GA (20GA NON-STD.)  
AVAILABLE LENGTHS: 5’-20’




PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.





PANEL DETAILS




PCH-01

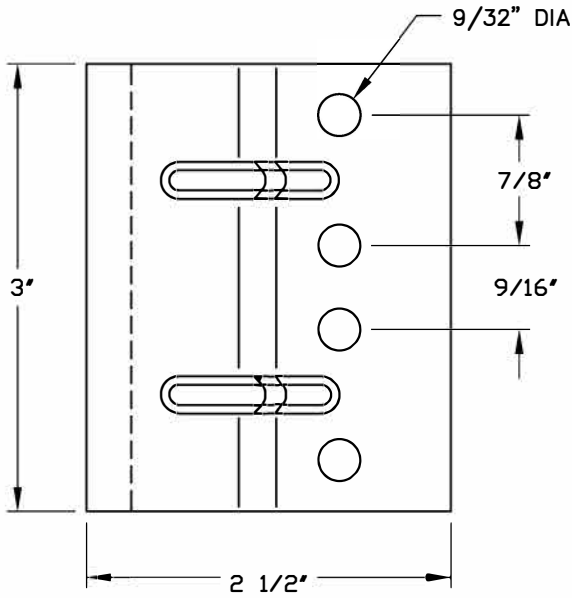

FLUSH CLIP  
P/N: #WALLCLP

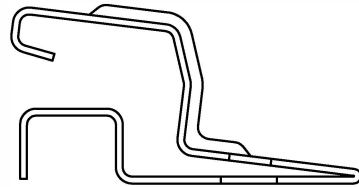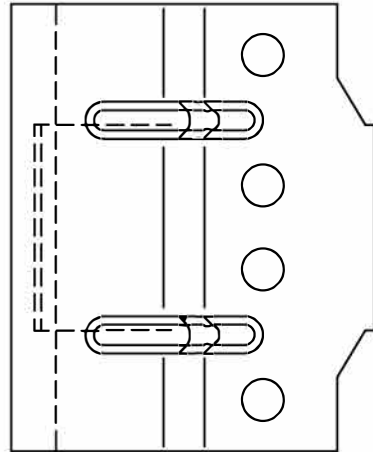

STANDOFF CLIP  
P/N: #WALLCLP0.5

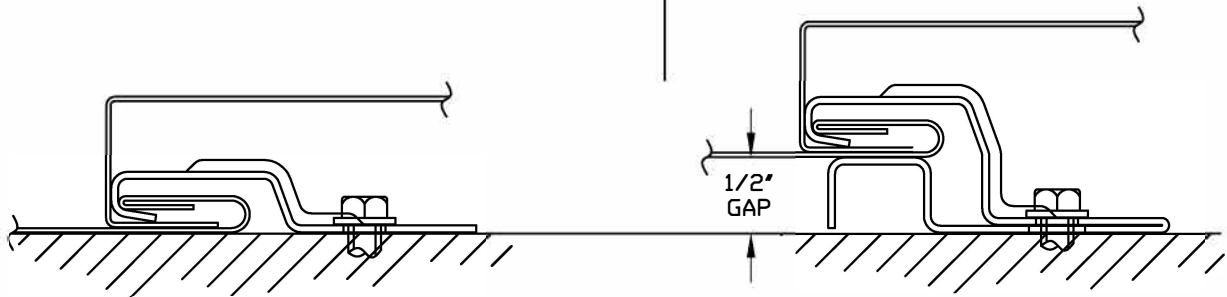

INSTALLED POSITION




PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.



CLIPS

PCH-02


CLPC-1P

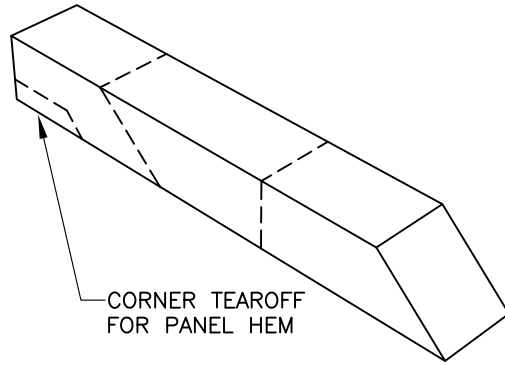

— TOP SIDE CLOSURE FOR ALL PANELS &  
BOTTOM SIDE CLOSURE FOR PC10-12


— CORNER TEAROFF  
FOR PANEL HEM

CLPC-2P

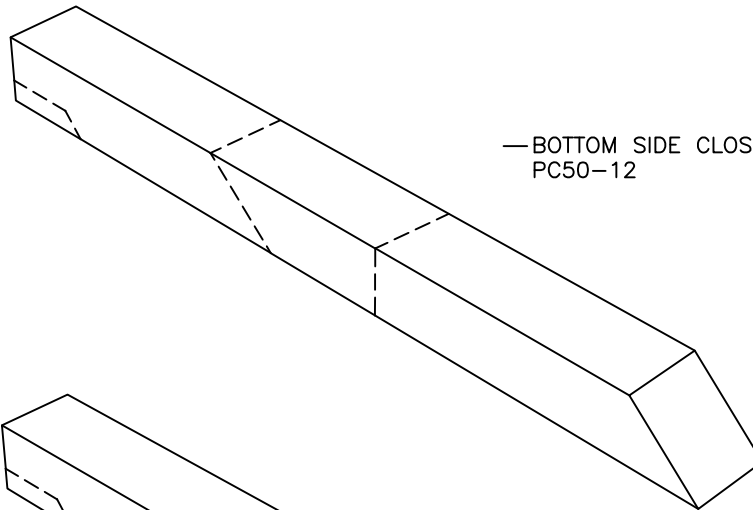

— BOTTOM SIDE CLOSURE FOR PC40-12 &  
PC50-12

CLPC-3P

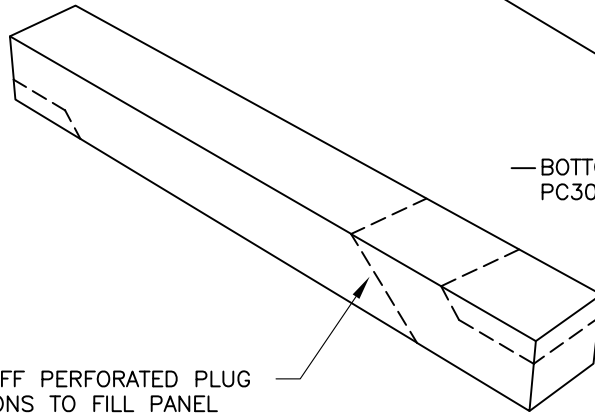


— BOTTOM SIDE CLOSURE FOR PC20-12 &  
PC30-12

TEAROFF PERFORATED PLUG  
SECTIONS TO FILL PANEL  
REVEALS AS REQUIRED

NOTE: APPLICATIONS UTILIZING STANDOFF CLIP ALSO REQUIRE  
UNIVERSAL CLOSURE STRIP (AEP #CLEM1x19.68 OR EQUIV.) TO  
SEAL OFF ADDITIONAL 1/2" PANEL-TO-SUBSTRATE GAP.



PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.




PANEL CLOSURES




PCH-03


TOP SIDE CLOSURE  
INSTALLATION

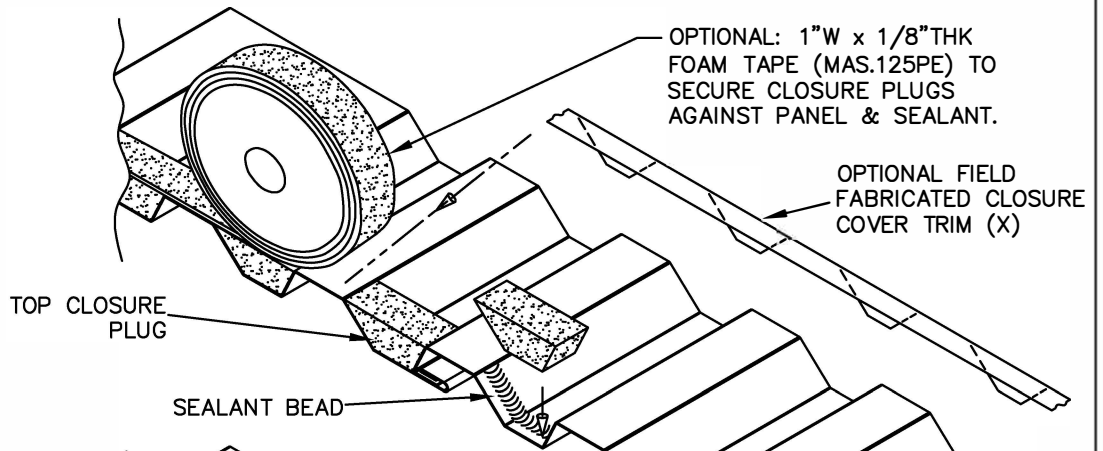

BOTTOM SIDE CLOSURE  
INSTALLATION  
(FLUSH MOUNTED PANELS)

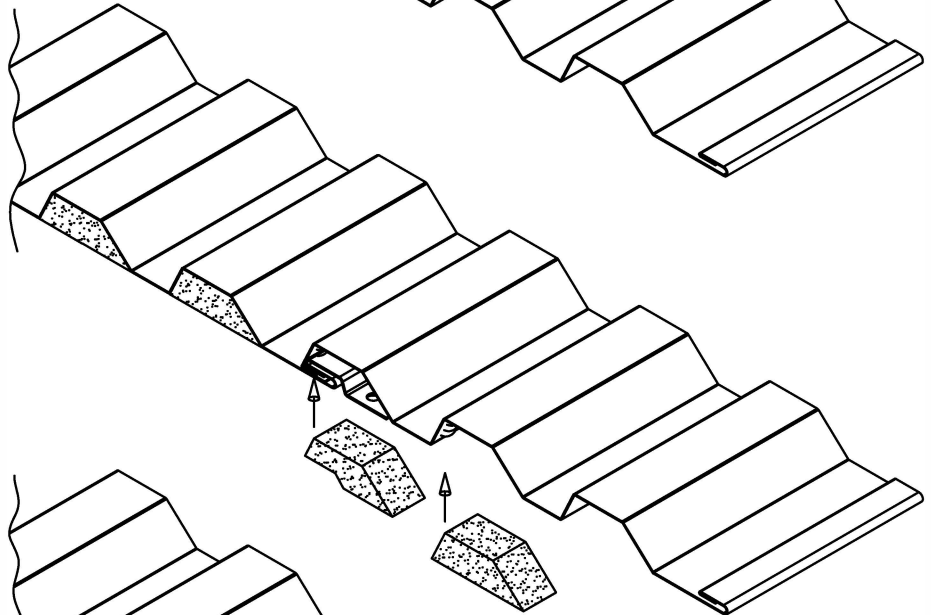

BOTTOM SIDE CLOSURE  
INSTALLATION  
(PANELS WITH STANDOFF CLIP)

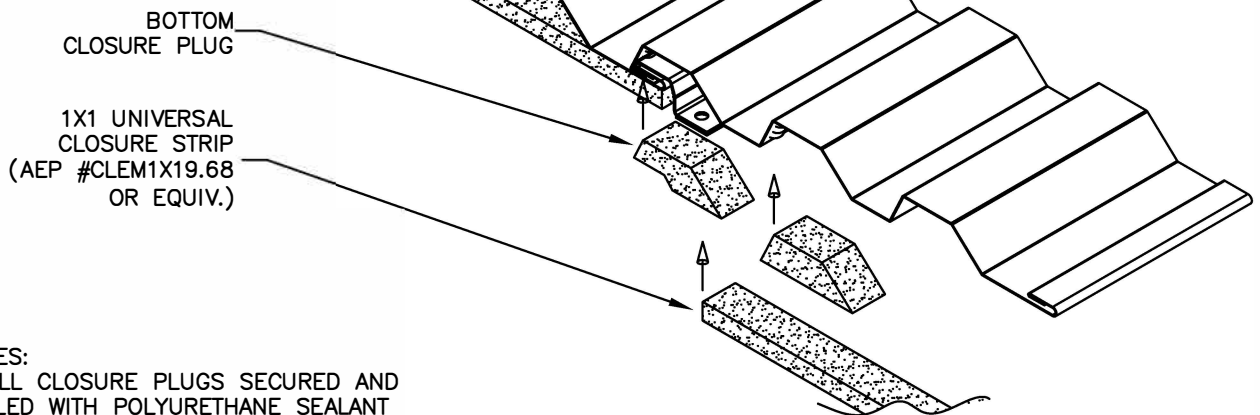

NOTES:  
 - ALL CLOSURE PLUGS SECURED AND  
 SEALED WITH POLYURETHANE SEALANT  
 (X) - NOT BY AEP SPAN



PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.



CLOSURE  
INSTALLATION




PCH-04

	TRIM	DIM. A	USAGE
1 1/2" A	ZC225	7/8"	FLUSH MOUNT
	ZC228	1 3/8"	W/0.5" STANDOFF

	TRIM	DIM. A	USAGE
4" A	DF026	1 1/4"	FLUSH MOUNT
	DF027	1 3/4"	W/0.5" STANDOFF

1" 1/2" 135°

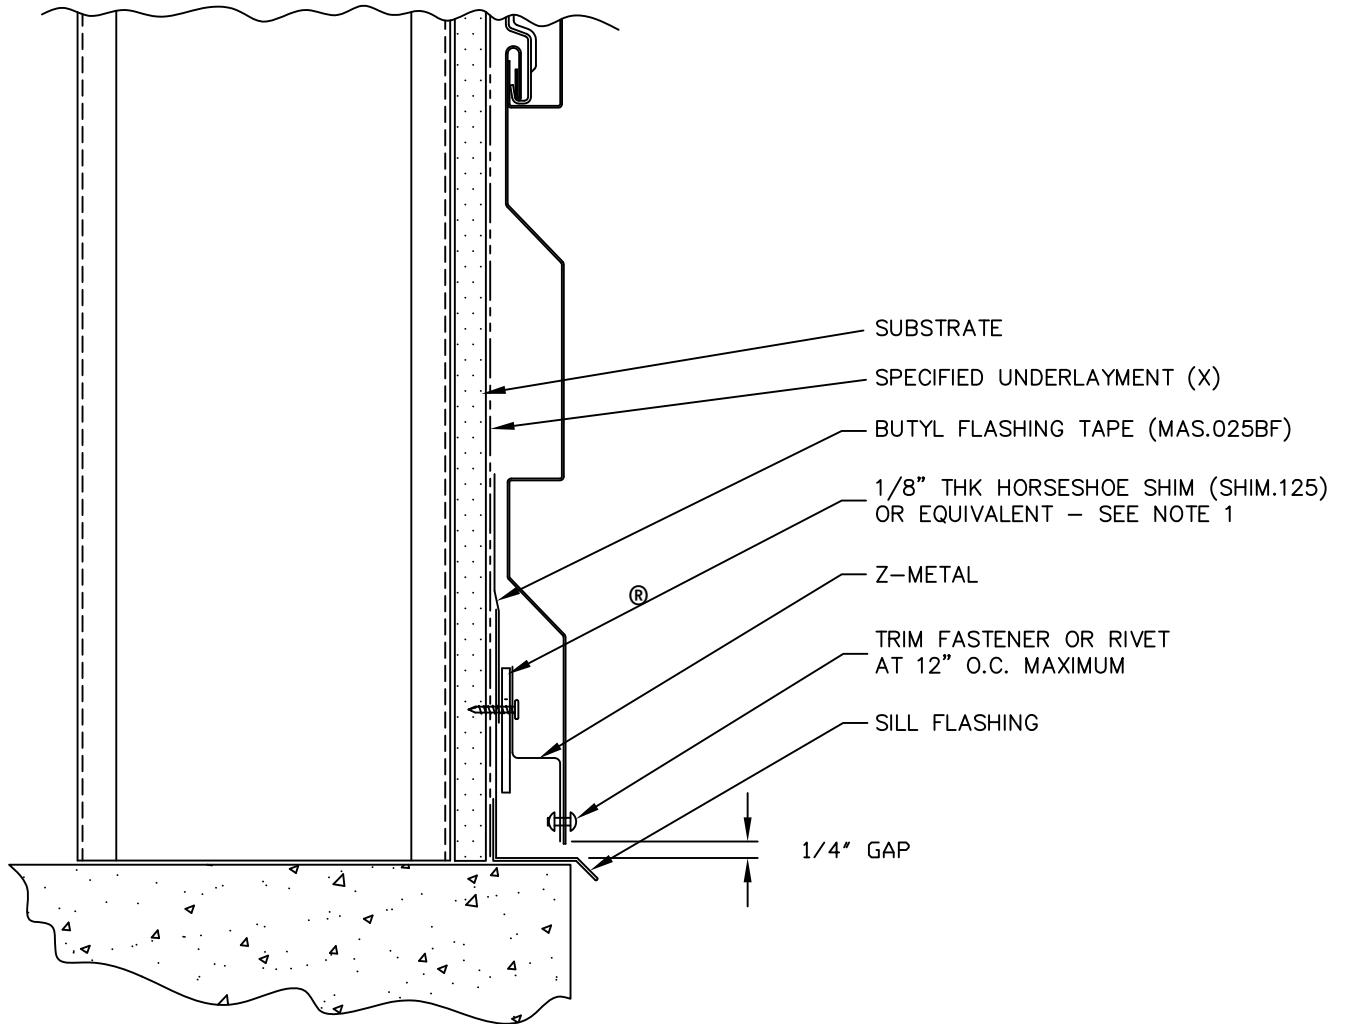


1. SHIM USED FOR MOISTURE CONTROL (DRAINAGE) IN FLUSH MOUNT APPLICATIONS. (X) - NOT BY AEP SPAN

PERCEPTION COLLECTION PANELS ARE INSTALLED FROM GROUND TO EAVE.



**PERCEPTION COLLECTION**  
HORIZONTAL INSTALL.



BASE




PCH-05



TRIM	DIM. A	USAGE
ZC225	7/8"	FLUSH MOUNT
ZC228	1 3/8"	W/0.5" STANDOFF


1 1/2" A 1 1/2"

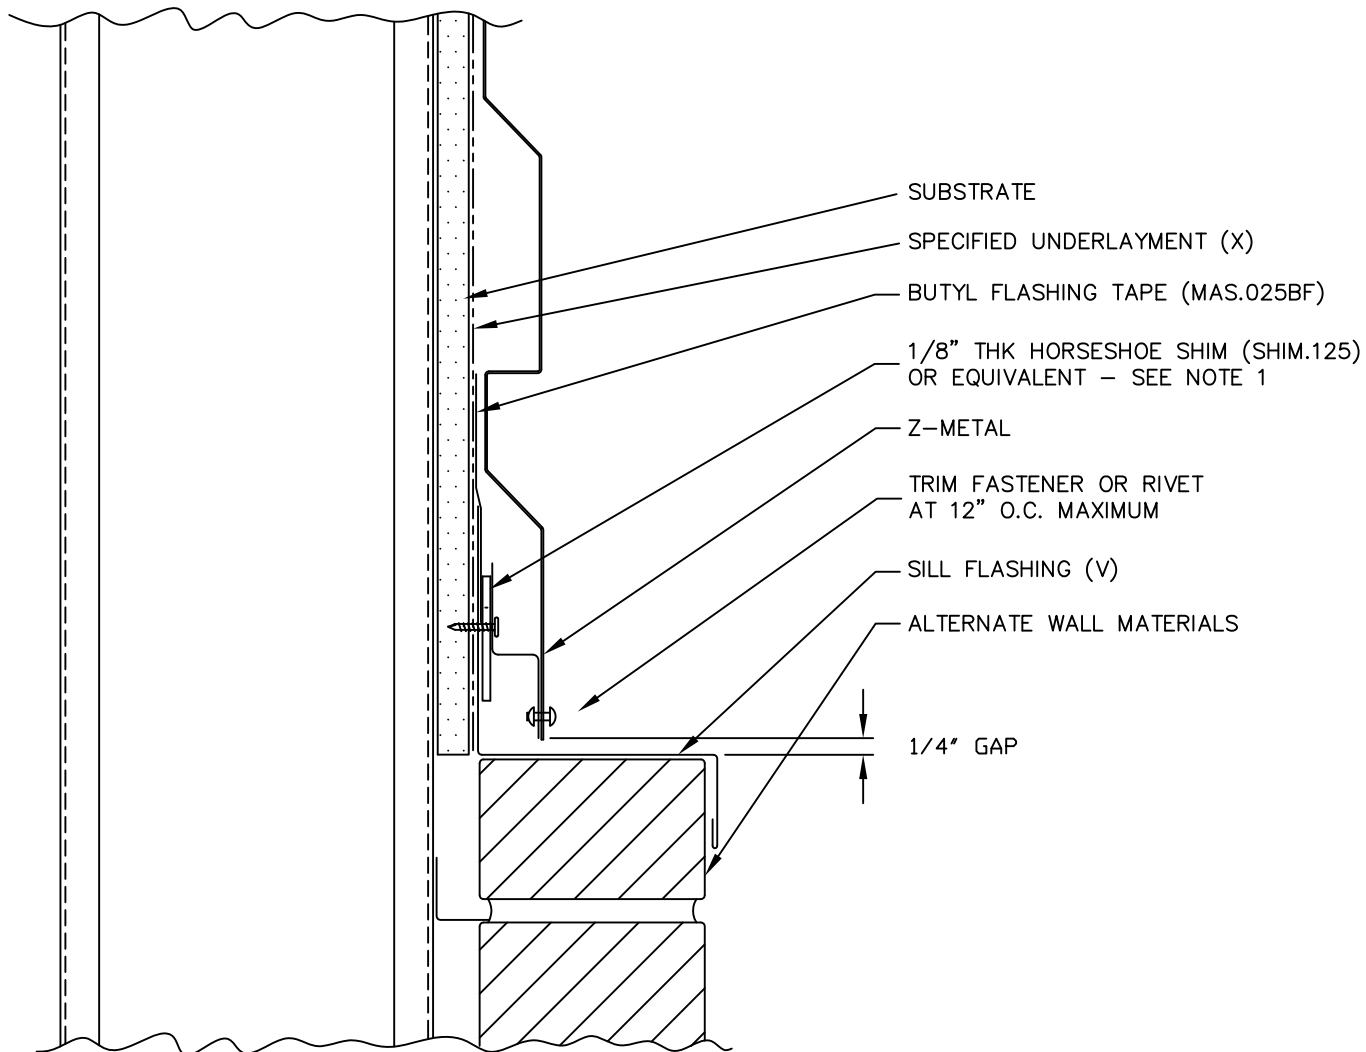

1. SHIM USED FOR MOISTURE CONTROL (DRAINAGE) IN FLUSH MOUNT APPLICATIONS.  
 (X) - NOT BY AEP SPAN  
 (V) - DIMENSIONS VARY BASED ON PROJECT CONDITIONS




**PERCEPTION  
 COLLECTION**  
 HORIZONTAL INSTALL.




SILL

PCH-06




TRIM	DIM A	DIM B	USAGE
JT108	1 1/8"	1 1/8"	FLUSH MOUNT
JT112	1 5/8"	1 1/2"	W/0.5" STANDOFF

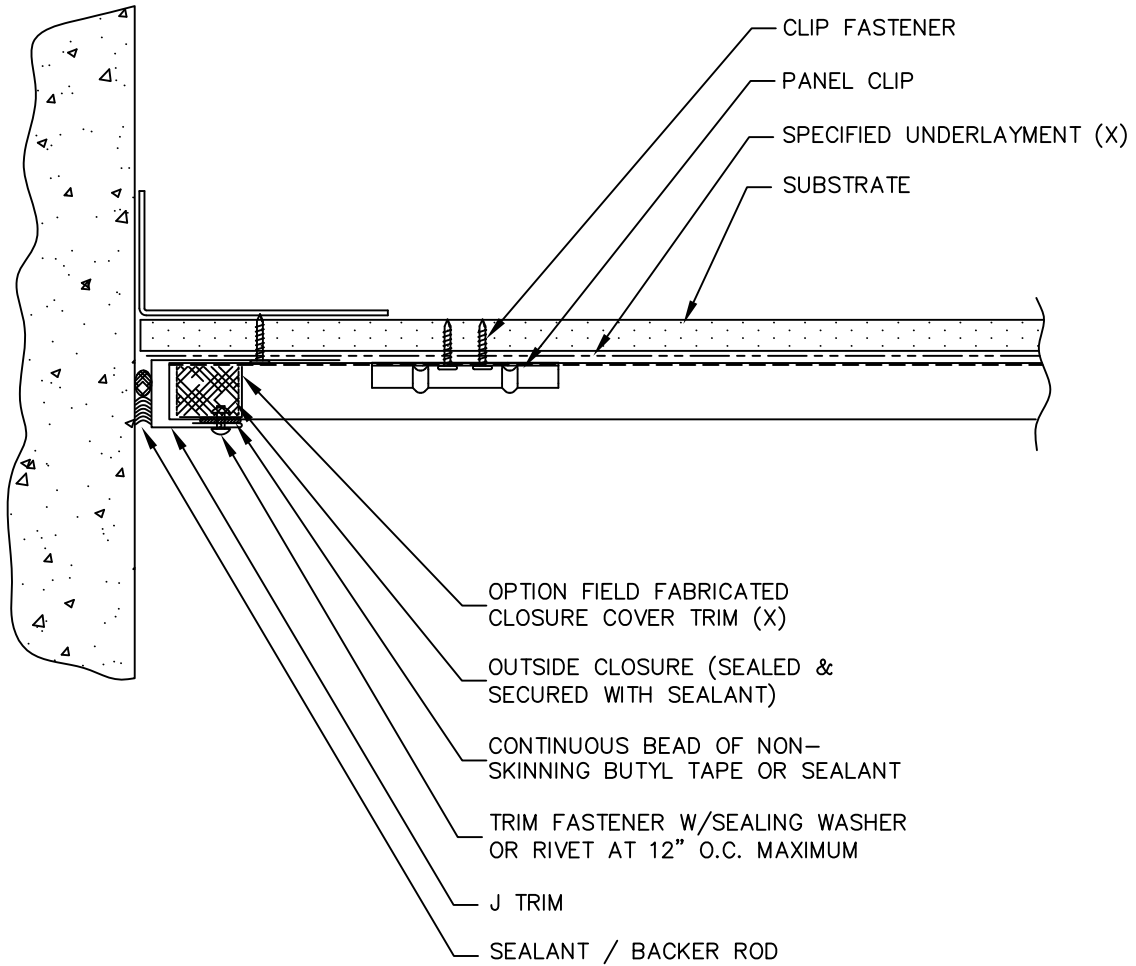

(X) – NOT BY AEP SPAN





**PERCEPTION  
COLLECTION**  
HORIZONTAL INSTALL.



END WALL



PCH-07

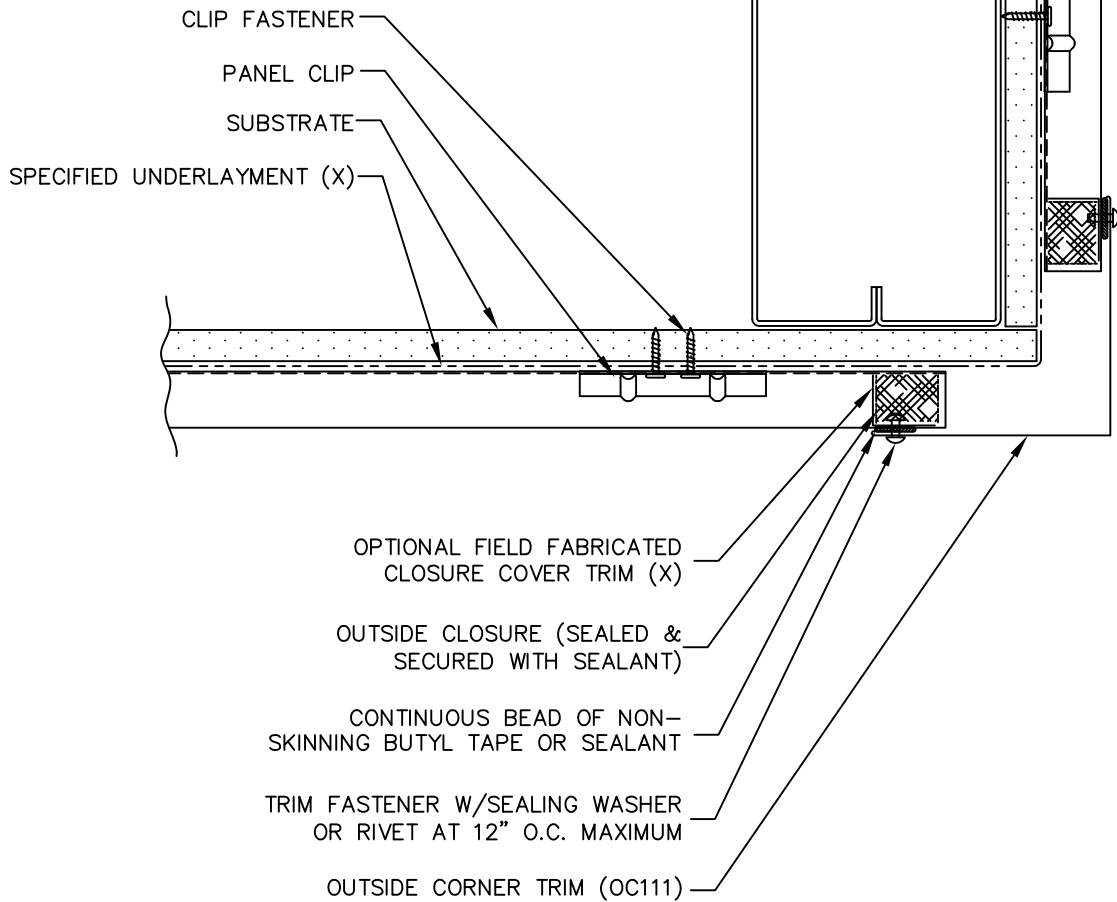

(X) - NOT BY AEP SPAN




PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.



OUTSIDE CORNER



PCH-08

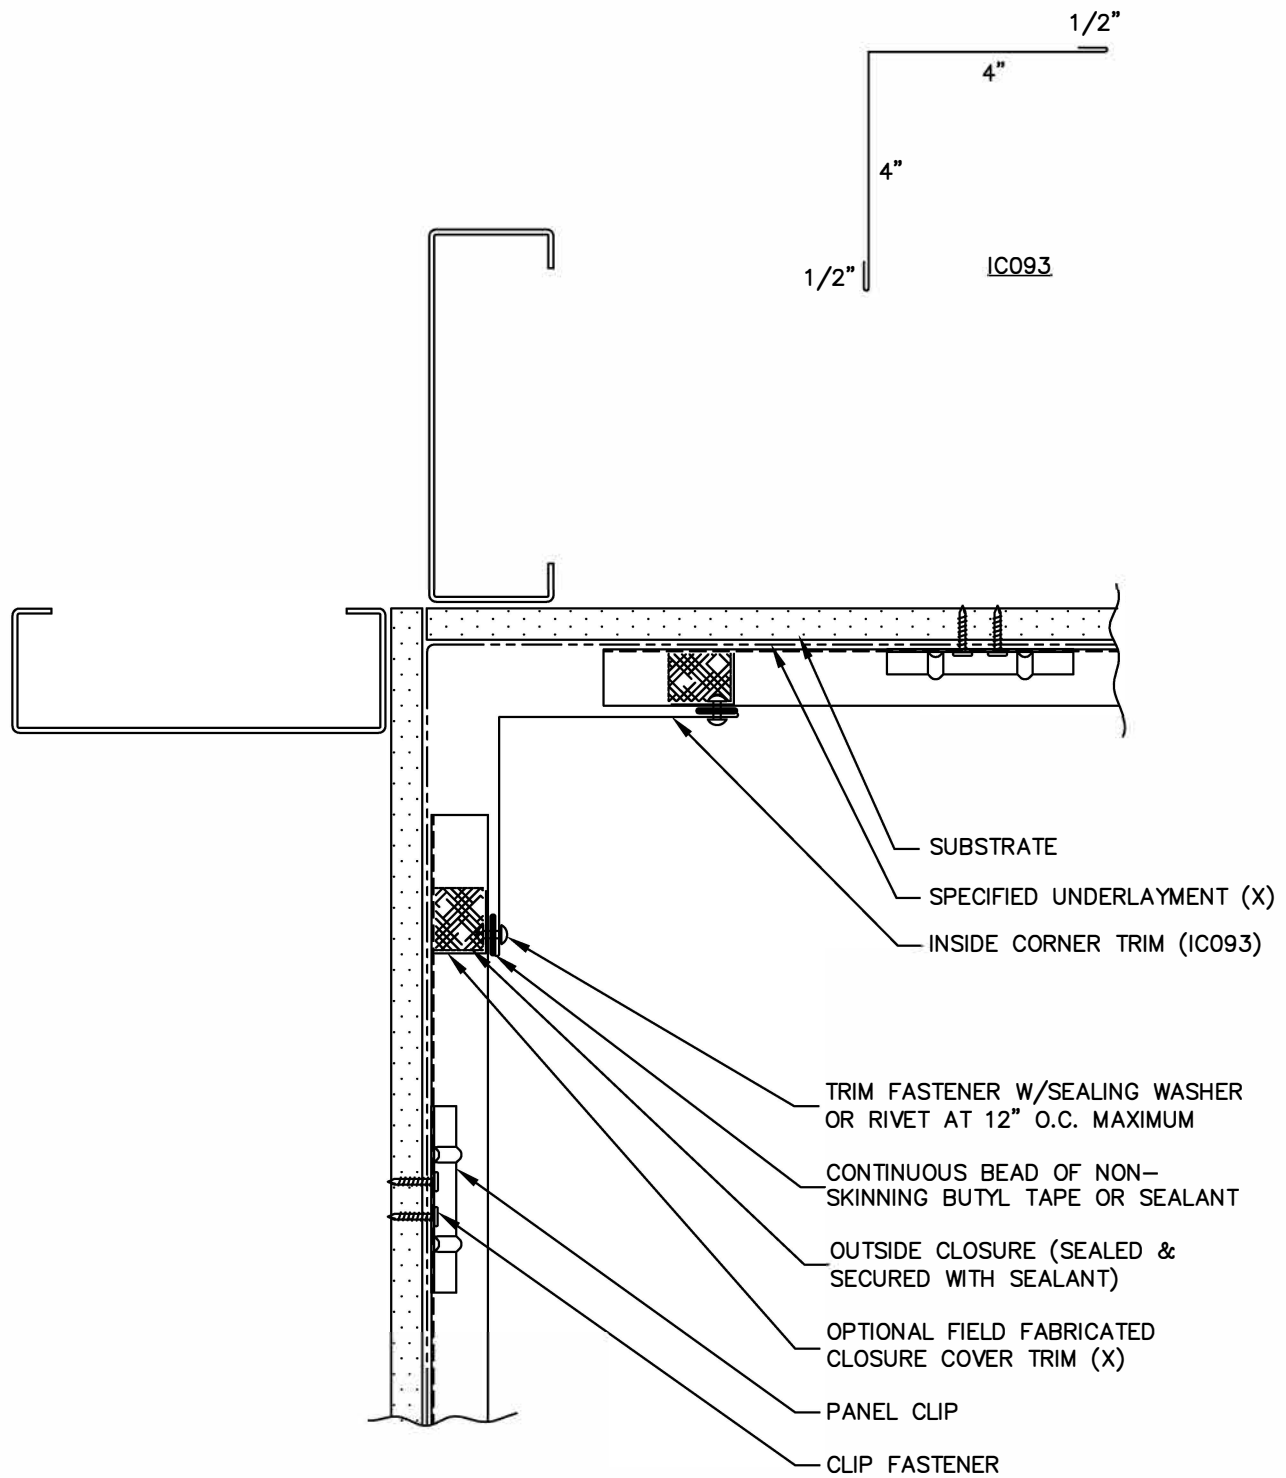

(X) - NOT BY AEP SPAN



PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.




INSIDE CORNER





PCH-09

	TRIM	DIM A	USAGE
1 1/2" A	ZC225	7/8"	FLUSH MOUNT
	ZC228	1 3/8"	W/0.5" STANDOFF

TRIM	DIM A	USAGE
DF032	1 1/8"	FLUSH MOUNT
DF033	1 5/8"	W/0.5" STANDOFF



COVER TRIM

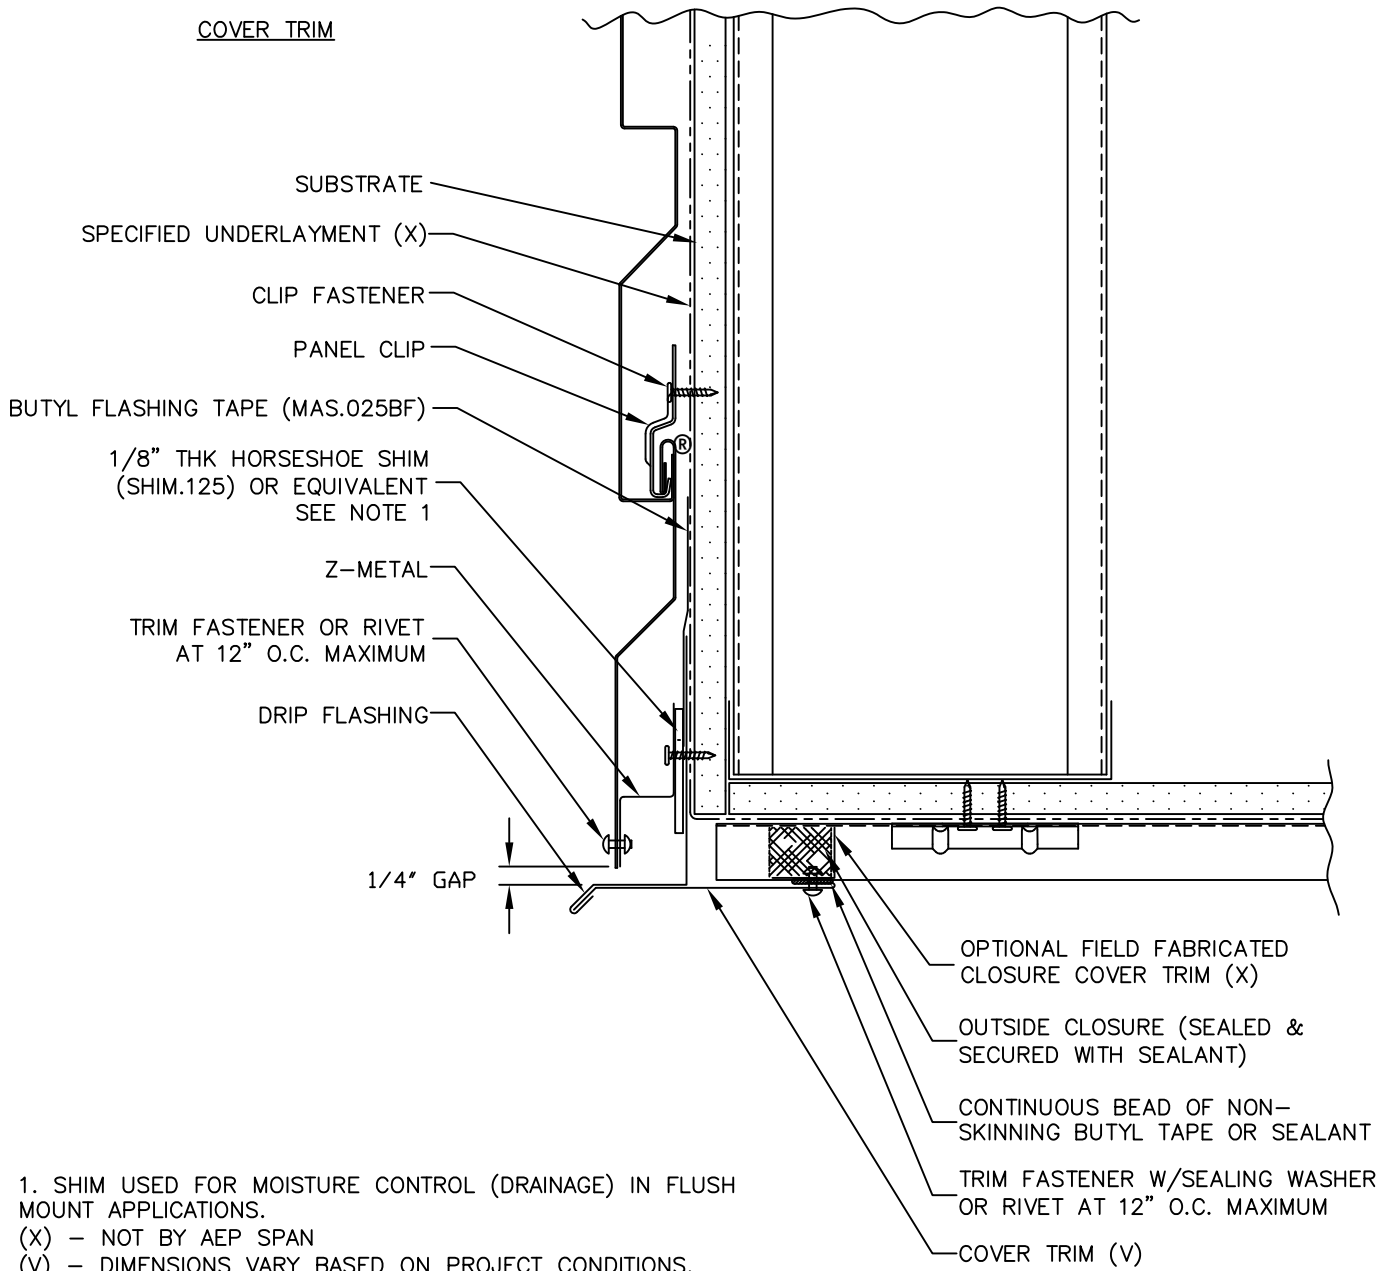


1. SHIM USED FOR MOISTURE CONTROL (DRAINAGE) IN FLUSH MOUNT APPLICATIONS.

(X) - NOT BY AEP SPAN

(V) - DIMENSIONS VARY BASED ON PROJECT CONDITIONS.





PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.



SOFFIT (FRONT)




PCH-10

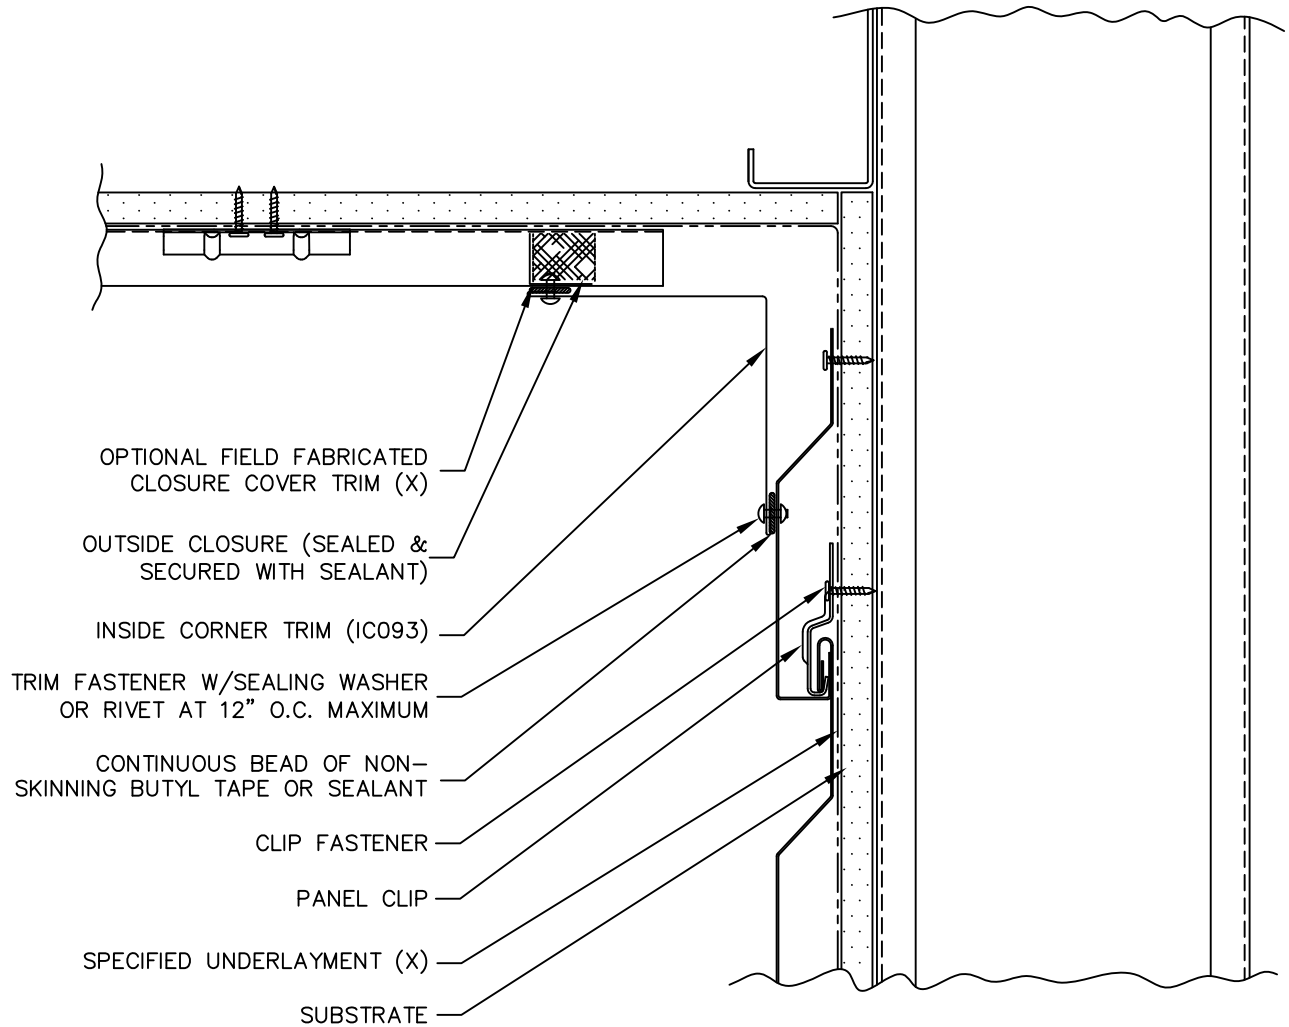

(X) – NOT BY AEP SPAN




**PERCEPTION  
COLLECTION**  
HORIZONTAL INSTALL.





SOFFIT (BACK)




PCH-11



TRIM	DIM A	USAGE
MT110	1 1/8"	FLUSH MOUNT
MT114	1 5/8"	W/0.5" STANDOFF

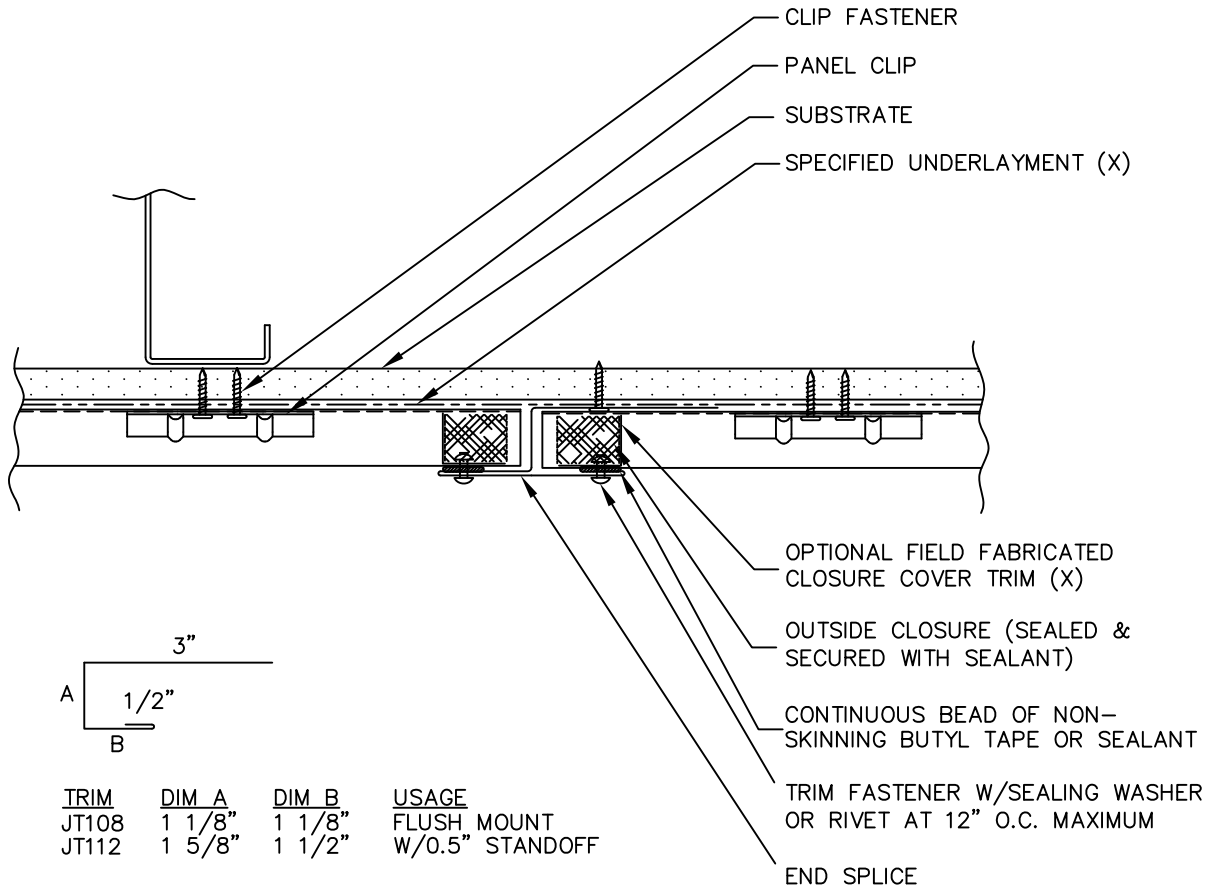


TRIM	DIM A	DIM B	USAGE
JT108	1 1/8"	1 1/8"	FLUSH MOUNT
JT112	1 5/8"	1 1/2"	W/0.5" STANDOFF

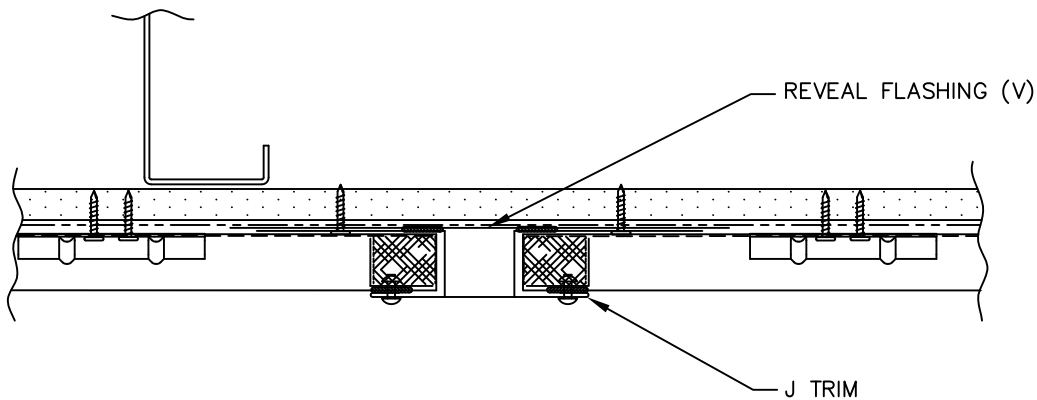

(X) - NOT BY AEP SPAN  
 (V) - DIMENSIONS VARY BASED ON PROJECT CONDITIONS




PERCEPTION  
 COLLECTION  
 HORIZONTAL INSTALL.




END SPLICE (W/TRIM)



PCH-12




TC209

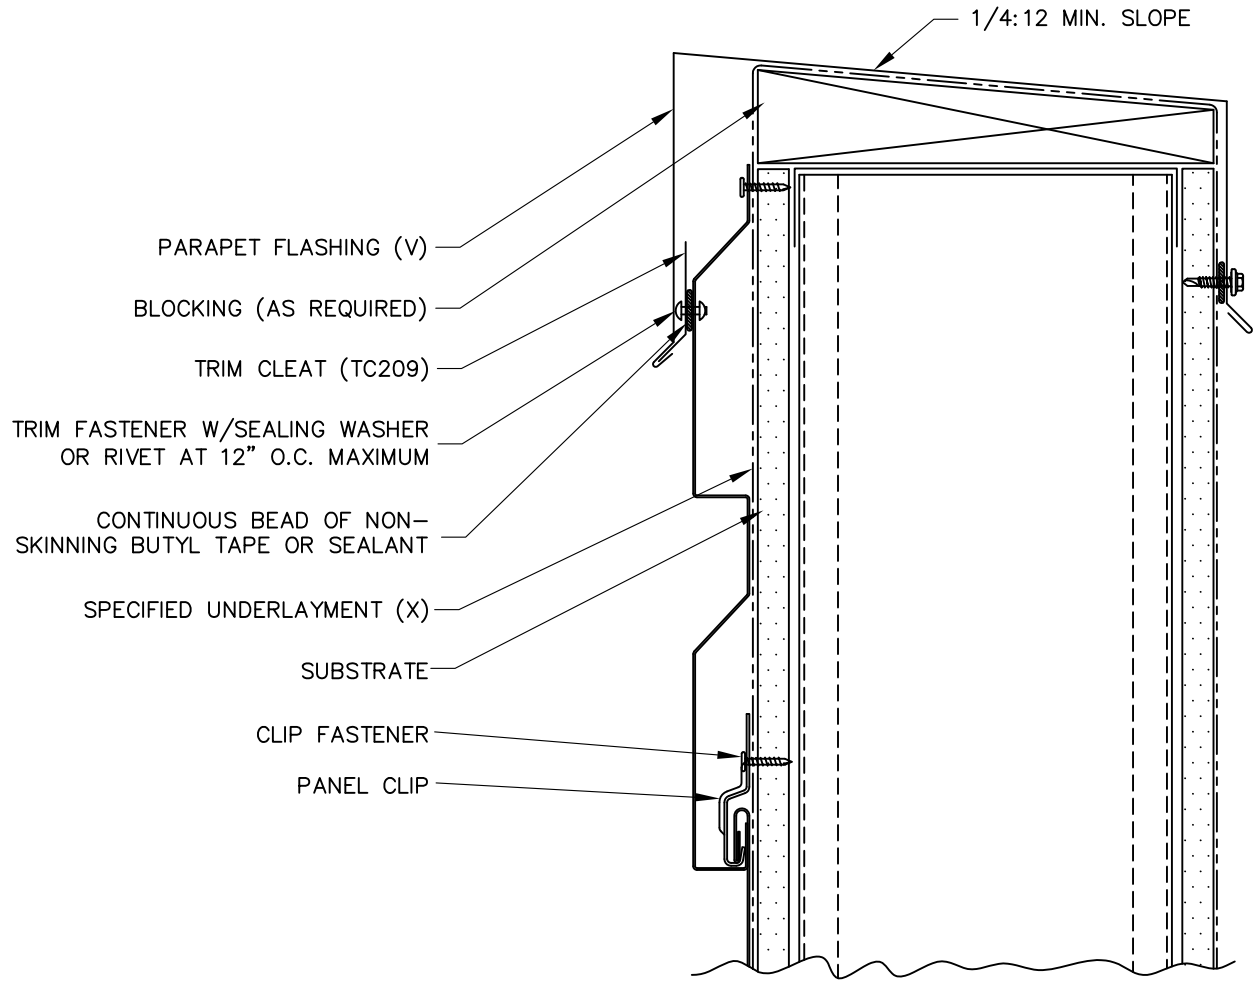

(X) - NOT BY AEP SPAN  
 (V) - DIMENSIONS VARY BASED ON PROJECT CONDITIONS



**PERCEPTION  
 COLLECTION**  
 HORIZONTAL INSTALL.




PARAPET





PCH-13





TRIM	DIM_A	USAGE
ZC225	7/8"	FLUSH MOUNT
ZC228	1 3/8"	W/0.5" STANDOFF


TRIM	DIM_A	USAGE
HT093	1 1/8"	FLUSH MOUNT
HT102	1 5/8"	W/0.5" STANDOFF

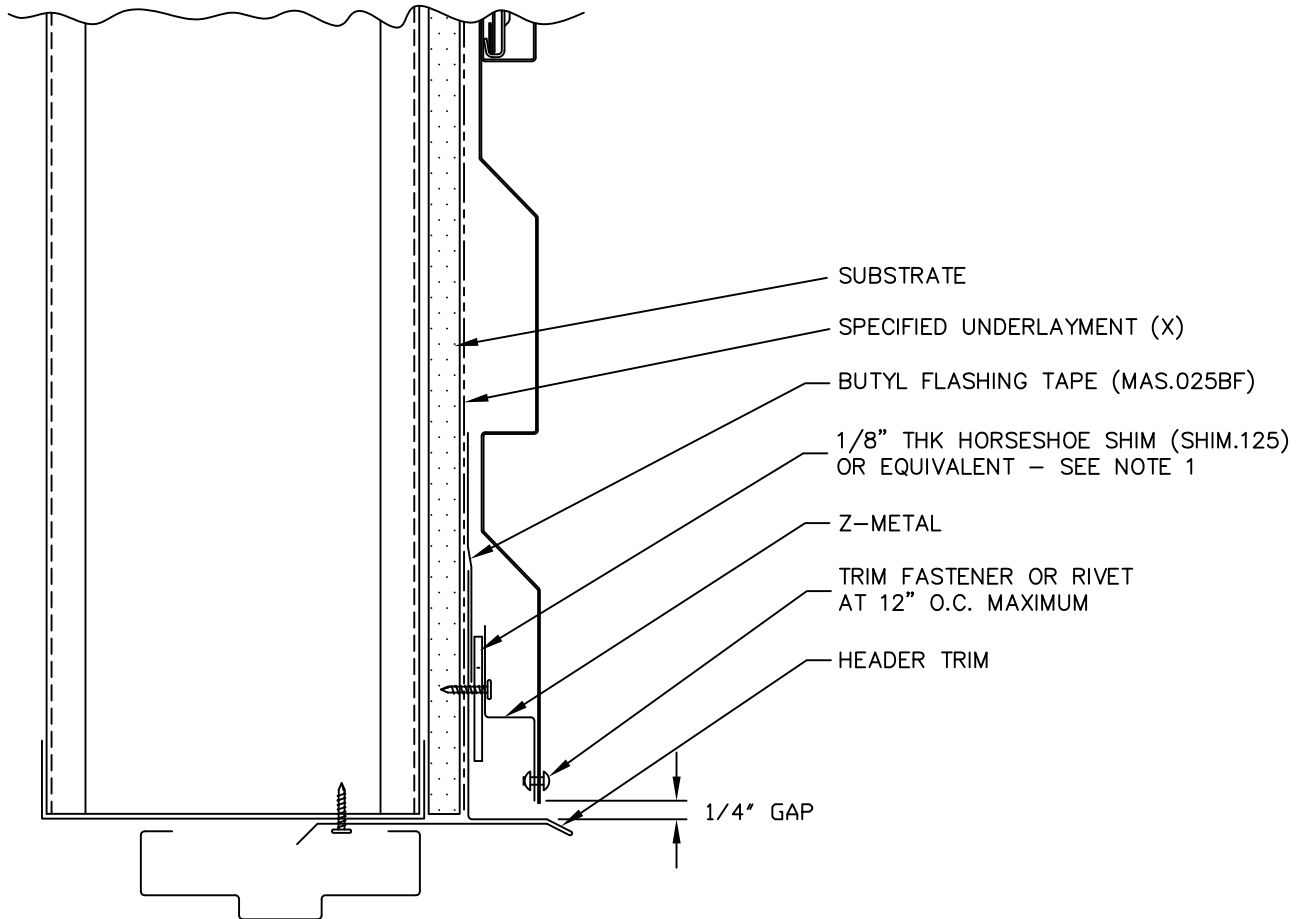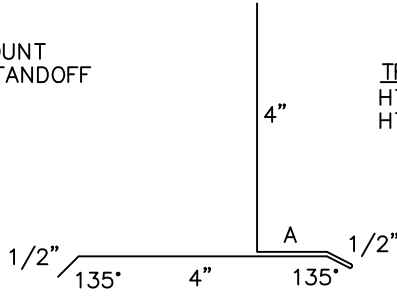

1. SHIM USED FOR MOISTURE CONTROL (DRAINAGE) IN FLUSH MOUNT APPLICATIONS.  
 (X) - NOT BY AEP SPAN





**PERCEPTION  
 COLLECTION**  
 HORIZONTAL INSTALL.




DOOR / WINDOW  
 (HEAD)



PCH-14

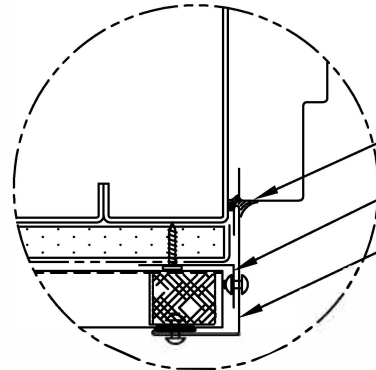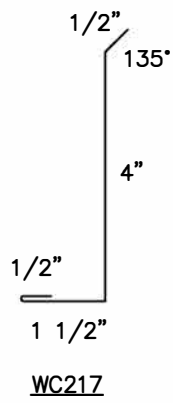

ALTERNATE DETAIL

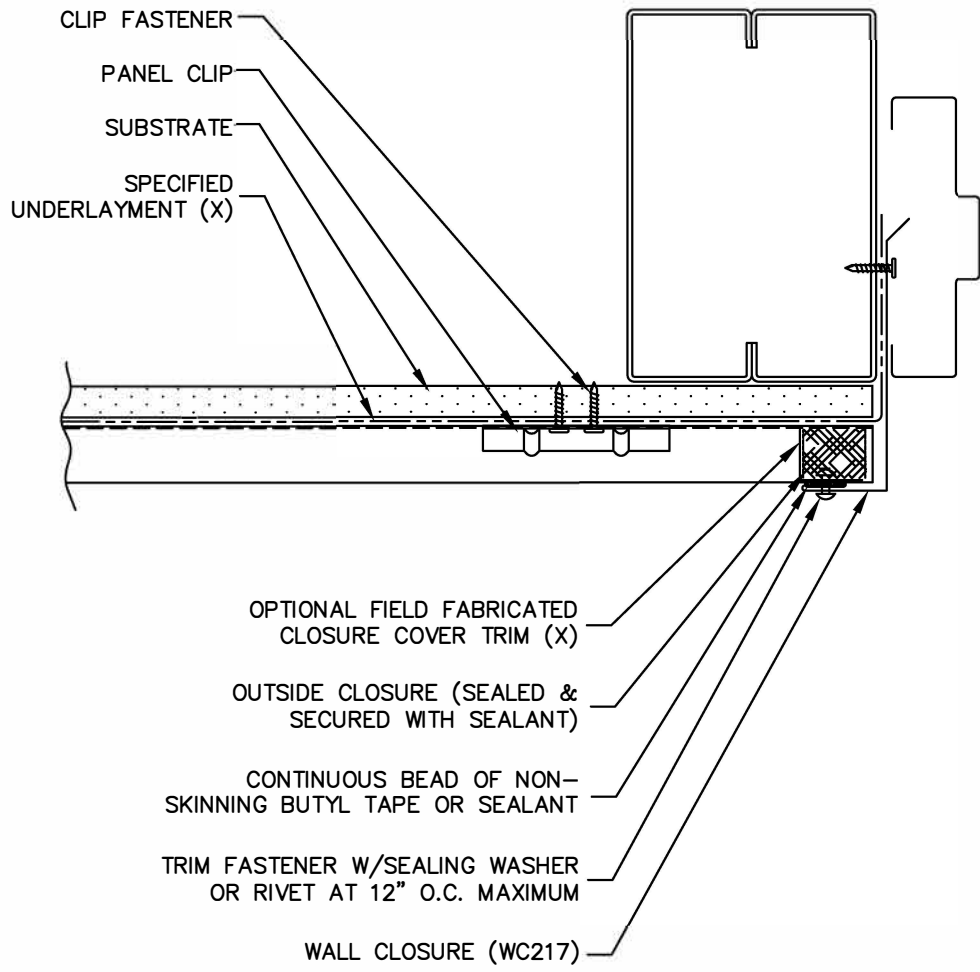

(X) - NOT BY AEP SPAN





PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.

DOOR / WINDOW  
(JAMB)



PCH-15


	TRIM	DIM. A	USAGE
1 1/2"	ZC225	7/8"	FLUSH MOUNT
A	ZC228	1 3/8"	W/0.5" STANDOFF

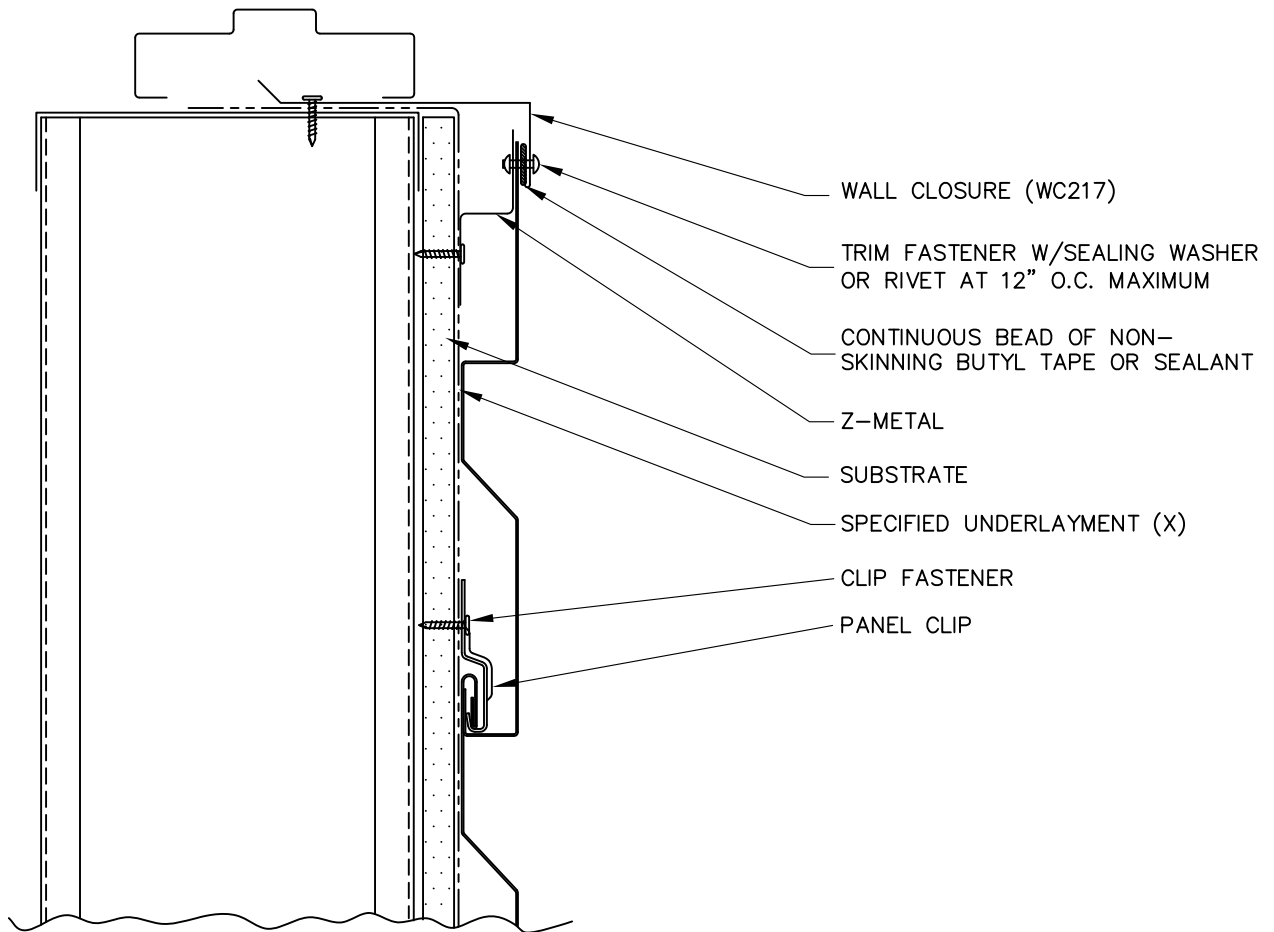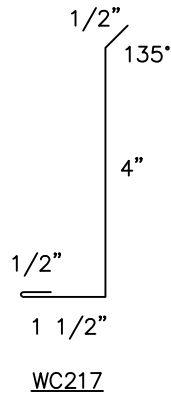

(X) - NOT BY AEP SPAN



**PERCEPTION  
COLLECTION**  
HORIZONTAL INSTALL.



DOOR / WINDOW  
(SILL)





PCH-16

TRIM FASTENER W/SEALING  
WASHER, OR RIVET

SEALANT

OVERLAP UPPER/LOWER  
FLASHINGS

WALL PENETRATION

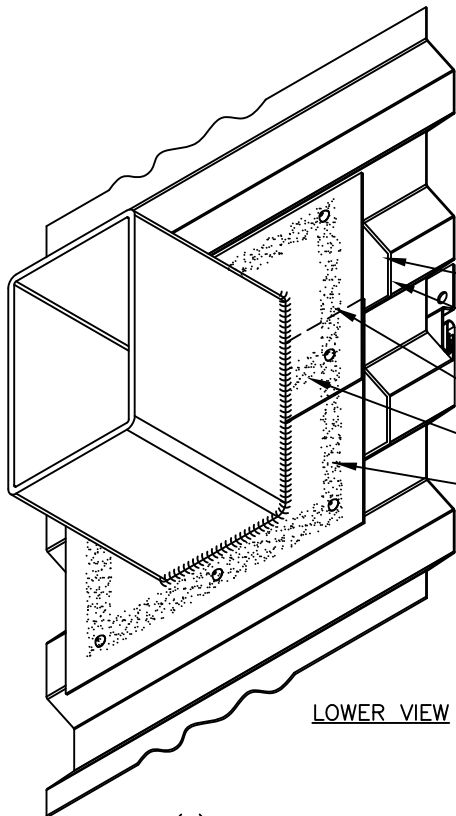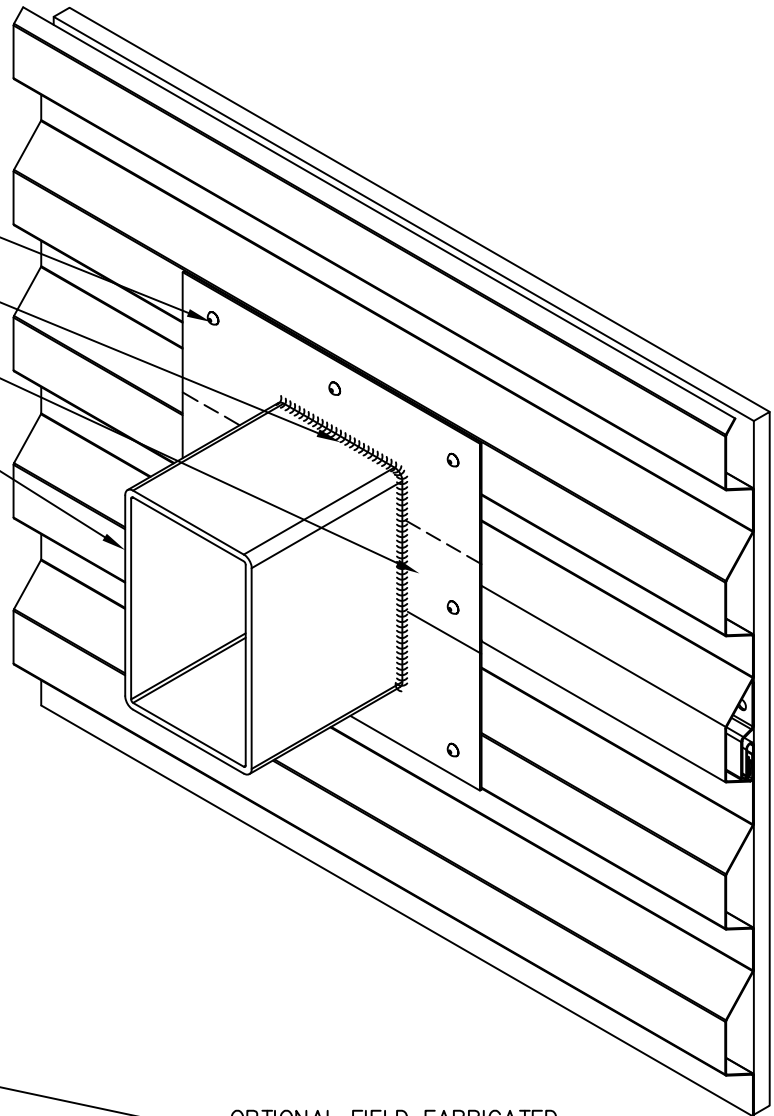

OPTIONAL FIELD FABRICATED  
CLOSURE COVER TRIM (X)

OUTSIDE CLOSURE (SEALED &  
SECURED WITH SEALANT)

SEAL PERIMETER OF FLASHINGS AND  
ALL TRIM OVERLAPS WITH A  
CONTINUOUS BEAD OF NON-  
SKINNING BUTYL TAPE OR SEALANT

LOWER VIEW

(X) - NOT BY AEP SPAN




PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.

WALL PENETRATION (3D)



PCH-17

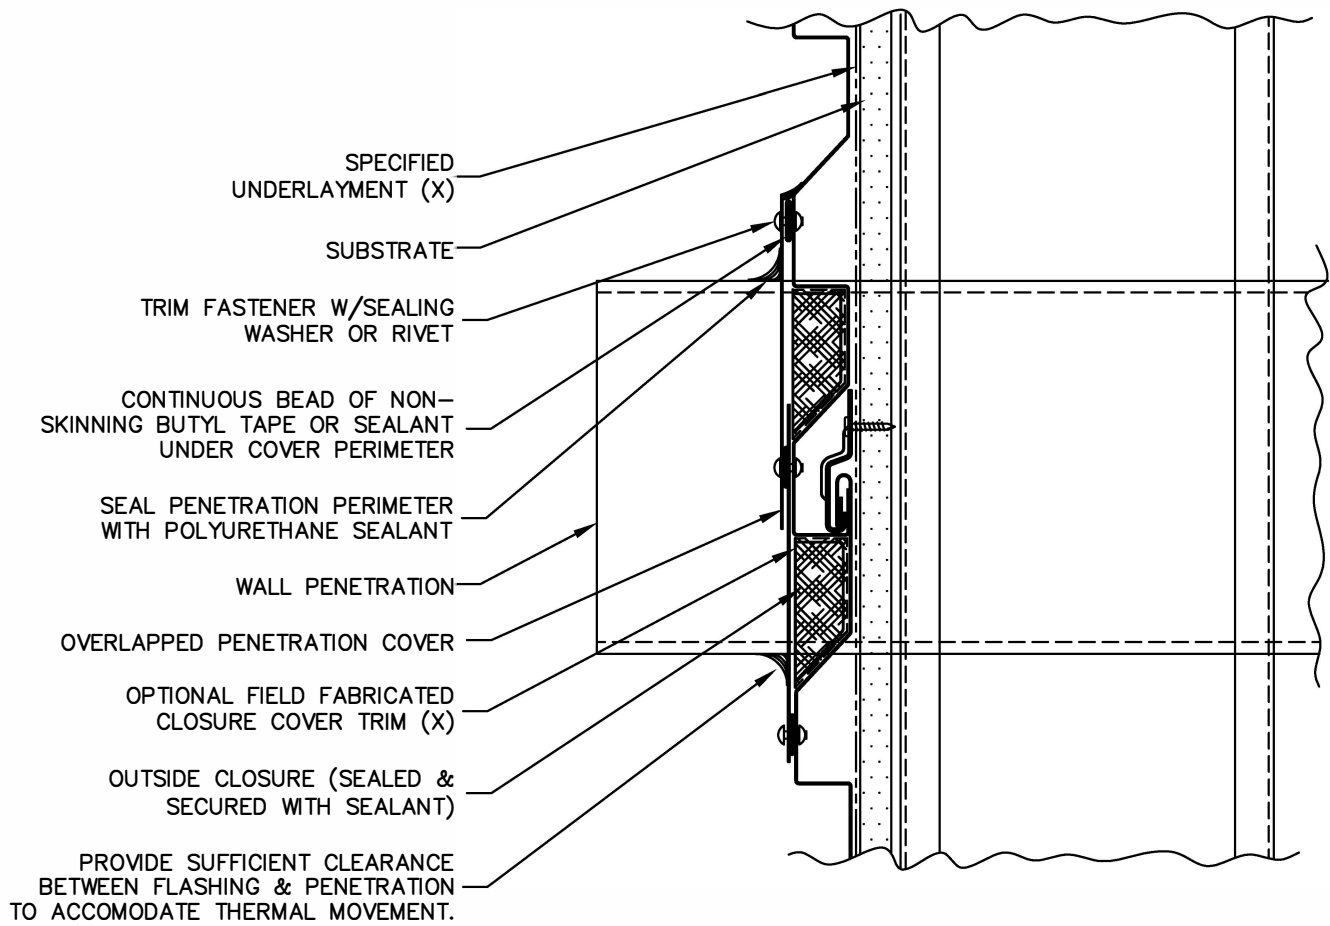

(X) – NOT BY AEP SPAN




PERCEPTION  
COLLECTION  
HORIZONTAL INSTALL.



WALL PENETRATION



PCH-18

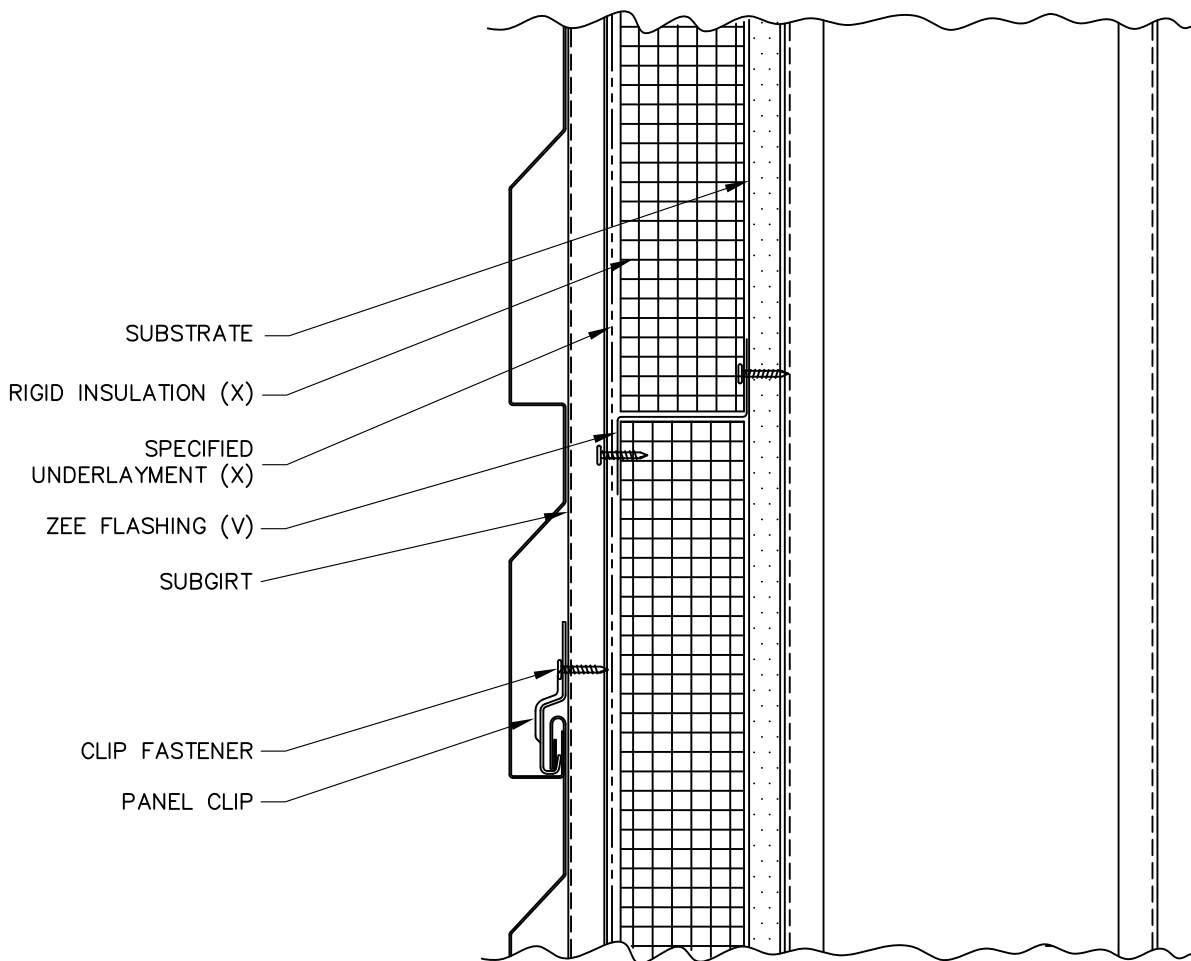

SUBSTRATE

RIGID INSULATION (X)

SPECIFIED UNDERLAYMENT (X)

ZEE FLASHING (V)

SUBGIRT


CLIP FASTENER

PANEL CLIP

(X) - NOT BY AEP SPAN  
 (V) - DIMENSIONS AND GAGE VARY BASED ON PROJECT CONDITIONS



**PERCEPTION  
 COLLECTION**  
 HORIZONTAL INSTALL.



RIGID INSULATION



PCH-19

MANUFACTURING FACILITY :

**Tacoma, Washington**  
2141 Milwaukee Way  
Tacoma, WA 98421

CORPORATE HEADQUARTERS:

**ASC Profiles LLC**  
2110 Enterprise Boulevard  
West Sacramento, CA 95711

CONTACT SERVICE:  
**800-733-4955**

visit us at:  
**[www.aepspan.com](http://www.aepspan.com)**

