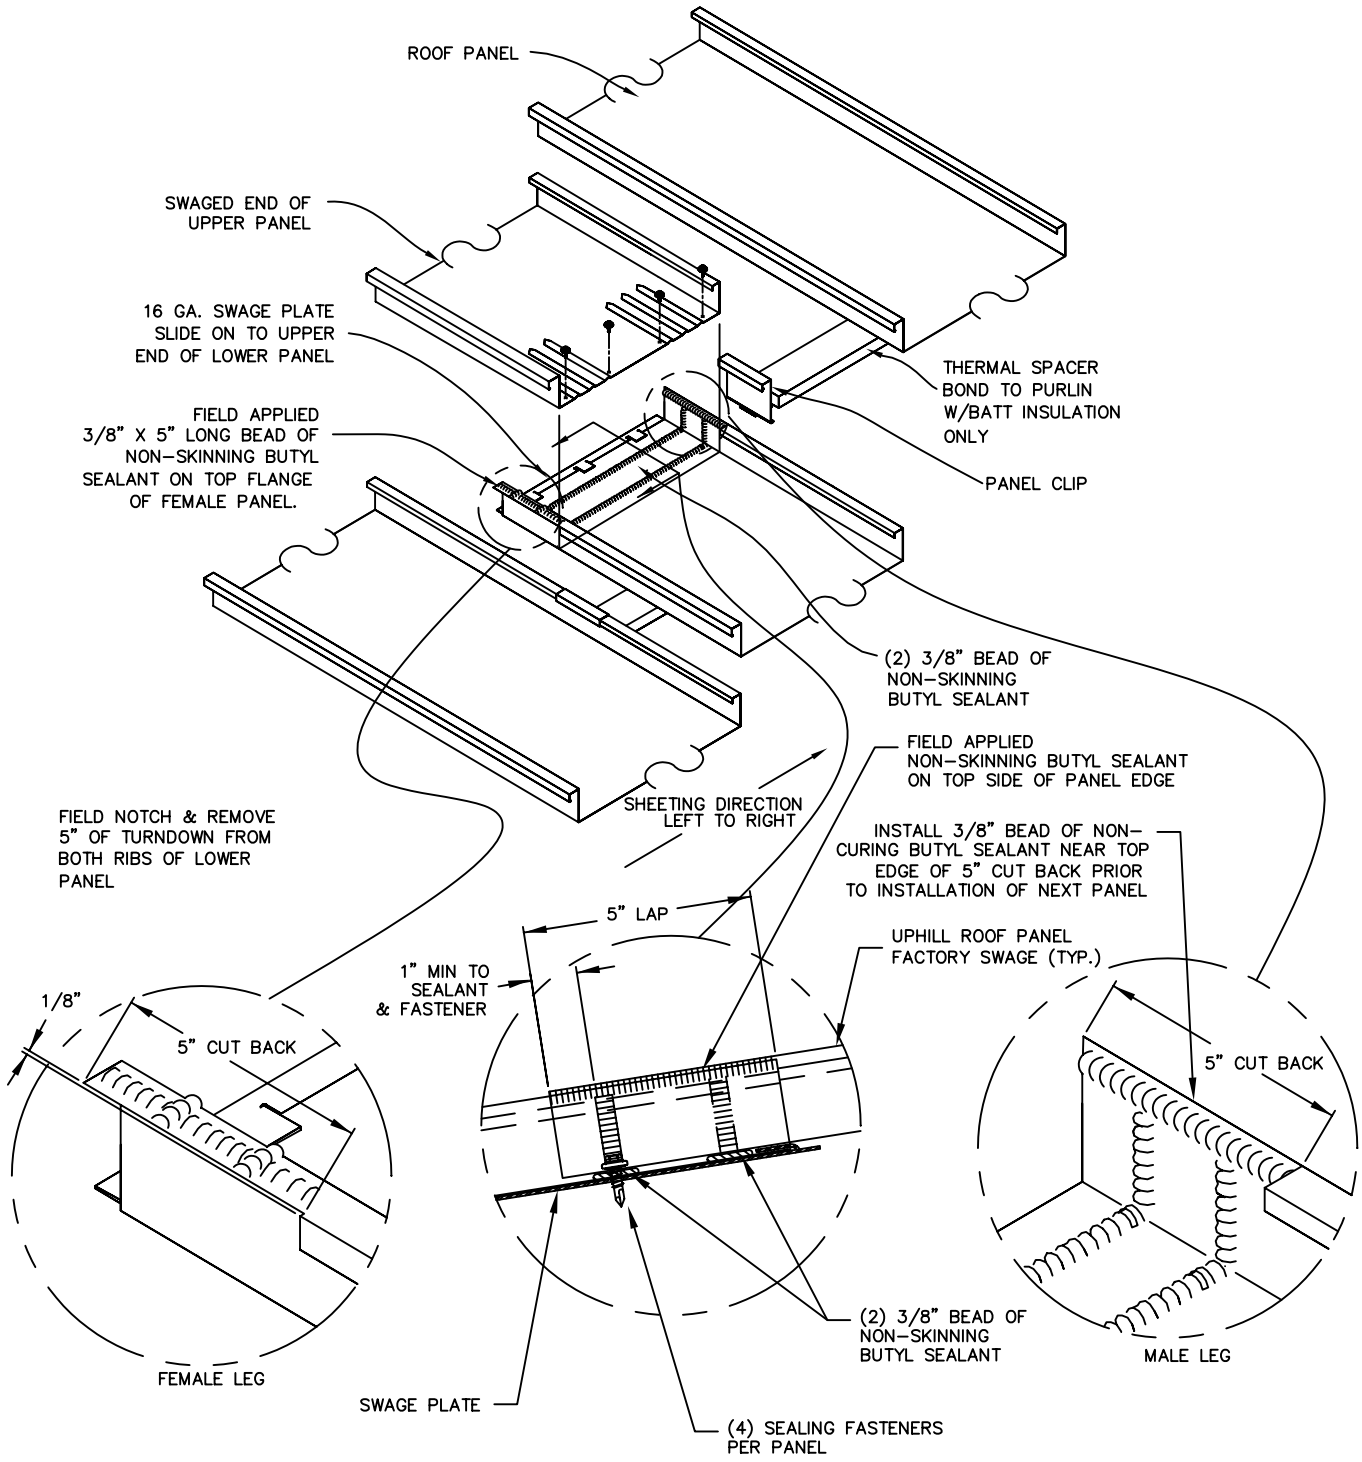

INSTALLATION NOTE
END LAP OF ADJACENT PANEL MUST BE STAGGERED AT LEAST ONE PURLIN SPACING OR A MIN. 24" TO PREVENT MATERIAL BUILDUP AT LAPS

AEP SPAN
Engineered Solutions in Metal

SPAN-LOK hp

PANEL LAP

SLHP3D3

REV. 11/01/07